



ECOFRIENDLY LUBRICATION SOLUTIONS



LUBRICATION SOLUTIONS

#V4

Specialist in industrial lubrication since 1958 and major actor in product development, MOLYDAL is contributing to the optimisation of industrial equipment lifetimes while improving user safety and operational cost-effectiveness. With its know-how, today MOLYDAL is a supplier partner for the food, sugar, granulation, steel, plastic injection, car, energy industries and many others.

MOLYDAL is well aware of the impact of petroleum products on the environment and health, and has been committed for over 10 years in an eco-designed product development programme. MOLYDAL is investing more than ever in research and development. Every year, there is a wider range of eco-responsible products. In particular, the eco-responsible range metalworking fluids offers products with optimum performance yielding gains in productivity and respect for operators' safety.

Degreaser performance is also improving, with no danger to users. As for maintenance products, as far as possible, MOLYDAL substitutes petroleum bases by biobased raw materials to offer customers a better alternative.

Associated with special application systems, MOLYDAL lubrication solutions are contributing to decreasing product loss and saving time for technicians. (MOLYDAL Roller Line roller lubricators, microspray, bench can degreasers).

A team of specialists is at users' disposal for support with custom solutions and recommendations.



PRODUCTS LIST

ADS 530	3
AGL 80 AL	2
AGR 100	2
AIR S22 AL	4
H VG.....	6
KL 9 H.....	3
KL BIO	3
KLW 10	3
LUBA 16.....	6
LUBA 21.....	5
LUBA 40.....	5
LUBA 501	5
LUBA 50/1	7
LUBA 200	6
LUBA 251.....	5
P 716	4
SOLESTER 77	7
SOLESTER 530.....	6
SOLESTER 600	7
TOP LUB.....	4
VEGA 68.....	2
VEGA 908.....	2
VG CUT 77	7

SUMMARY

GREASES	2
CHAIN AND CABLE LUBRICANTS	2
DEGREASERS.....	3
V.O.C. FREE PENETRATING OILS	4
COMPRESSED AIR LUBRICANTS	4
HIGH TEMPERATURE LUBRICANTS.....	4
NEAT OILS	5
SOLUBLE OILS	7



With these two logos, products for the food industry approved by the NSF or 2probitry (European food certification body) in the following categories can easily be identified:

- K1 for solvent-based cleaners - Products for untreated areas
- A1 for general cleaners
- H1 for general accidental contact lubricants
- 3H for lubricants in direct contact



With MOLYDAL's own logo "MOSH MOAH FREE LUBRICANTS", products containing neither MOSH nor MOAH, important criteria for the food industry, can be identified..

- MOSH: Mineral oil saturated hydrocarbons
- MOAH: Mineral oil aromatic hydrocarbons

These substances are food contaminants and are considered to be potentially harmful to health (genotoxic or mutagenic).



With MOLYDAL's own GREEN LUBRICANTS logo, eco-responsible products can be identified.

- **PERFORMANCE:** products with the same or even better performance than mineral-based products, with technical data displayed as indicator.
- **SAFETY:** products without safety pictographs; safety indicator consultation of FDS on demand.
- **ENVIRONMENT:** maximum use of biosourced raw materials in product formulation, indicator: Molydal is a participant in the "USDA BioPreferred® Program" and is committed to the certification of its eco-responsible products.



The labelling of USDA certified biobased products with BioPreferred® users can identify and compare the biosourced products

What's a biobased product ?

Biobased products are plant derivatives and other renewable agricultural, marine and forest materials. They generally provide an alternative to conventional oil-derived products and include a varied range of offers such as lubricants, detergents, inks, fertilizers and bioplastics.

What does renewable mean ?

Renewable describes an inexhaustible and easily replaceable source. In the context of biosourced products, renewable resources include agricultural, forest and marine resources such as seaweed, and not the product itself.

What's a USDA certified biosourced product ?

It's a product with biosourced content that has been verified by a third party, and that has obtained the USDA (United States Department of Agriculture). certification and approval.

The USDA BioPreferred® Program has established minimum standards for biosourced content in various product categories. To be certified, the product must reach or exceed the minimum percentage of content of biosourced origin in the given category.

The certified product is then authorised to display the "USDA Certified Biobased Product" logo giving the percentage of biosourced contained in the product.

A list of product categories and their




biosourced content is available at <http://www.biopreferred.gov/BioPreferred/faces/pages/ProductCategories.xhtml>.

In the example of a label below, the product X contains 86% of USDA certified biosourced content.




The design of this label symbolises the sun, the soil and the aquatic environments.

The percentage of biosourced content refers to the ratio between carbon from renewable sources and total carbon in a product.

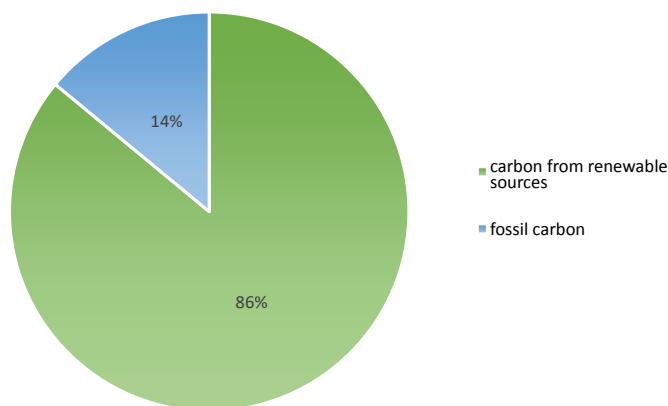

By choosing a biosourced product certified as "USDA Certified Biobased Product", the consumer has a guarantee on the accuracy of the percentage of biosourced raw materials shown on the label.

For more information, go to the site <http://www.biopreferred.gov>.



GREASES



PACKING		REF
400 G	CARTRIDGE	AGR100CA
50 KG	KEG	AGR10050
180 KG	DRUM	AGR100FT

AGR 100

BIODEGRADABLE MULTIPURPOSE WATER RESISTANT GREASE

DESCRIPTION

AGR 100 is made from vegetal oil and ester. It is a biodegradable grease with a calcium soap. It is a multipurpose grease to be used in environmentally sensitive areas. Its formulation complies with the standards of respect for the environment and of sustainable development promotion.

USE

Lubrication of bearings and any other mechanical organs in agriculture or transportation industries. General lubrication of any parts where environmental pollution is prohibited. Quarries, public works, wood industry, forestry, transportation etc ...

TECHNICAL DATA

- Operating temperature range: -45°C to +100°C
- NLGI Grade: 2
- > 90% of "easily biodegradable" raw material (OECD 301)



PACKING		REF
400 G	CARTRIDGE	AGL80ALCA
50 KG	KEG	AGL80AL50

AGL 80 AL

MOSH-MOAH & POSH FREE WHITE FOOD GRADE GREASE

DESCRIPTION

Lubricating grease made of biodegradable esters. Its fully synthetic base oil offers an optimised lifetime to lubricated mechanisms. AGL 80 AL has a good resistance to water washout, steam and detergents. It is free from mineral oil (MOSH-MOAH) and free from polyolefin (POSH). AGL 80 AL AL is registered by NSF International, in category H1. This indicates that it is authorized for use in incidental contact with food. (N°160760)

USE

Lubrication of bearings in pellet presses and crushing process (trituration). Lubrication of presses and any bearings in the food industry (can production, bevcan process etc). Lubrication of any kind of bearings working under loads, humidity, and a maximum operating temperature of 120°C. Any process in oil-mills. Can also be used in environmentally sensitive industries like marine and shipyard, agriculture, forestry, public works, quarries etc ...

TECHNICAL DATA

- Operating temperatures: -45°C to +120°C
- NLGI Grade: 2
- Load: 315 kg

CHAIN AND CABLE LUBRICANTS



PACKING		REF
650 / 400 ML	AEROSOL	VEGA908A2
20 L	JERRYCAN	VEGA90820
200 L	DRUM	VEGA908FT

VEGA 908

ECOFRIENDLY LUBRICANT FOR CHAINS AND CABLES

DESCRIPTION

Without safety labelling. Renewable raw materials-based, used for lubrication in moist conditions. used for lubrication in moist conditions. Smooth and adherent with good anti-wear qualities. Strong penetrative properties for homogeneous spreading of lubricant up to the centre of link shafts. VEGA 908 contains 100% USDA certified biobased content.

USE

For conveyor and quenching chains, paint oven and screen printing ovens. Used in all types of industry, automobile industry, tin cans, sugar, chemicals, etc.

TECHNICAL DATA

- Operating temperature range: -30°C to +140°C
- Viscosity @ 40°C: 160 cst (liquid)
- Non-flammable propellant: CO2
- RRM: 100%



PACKING		REF
20 L	JERRYCAN	VEGA6820
200 L	DRUM	VEGA68_FT

VEGA 68

ECOFRIENDLY CHAIN LUBRICANT

DESCRIPTION

Ester-based chain oil made from renewable raw materials. Produced without any environmental restriction. Made to be completely harmless to operators. Designed to be used in humid conditions (resist water wash-out). VEGA908 is adhesive and offers superior anti-wear properties.

USE

Lubrication of chains in dusty environments. Lubrication of guides and slides. Highly resistant to water-washout. Pulp & paper, wood industry etc'

TECHNICAL DATA

- Operating temperature range: -30°C to +200°C
- Viscosity @ 40°C: 68 cst
- RRM: > 86%

DEGREASING



KL 9 H

ECOFRIENDLY AQUEOUS DEGREASING CLEANER

DESCRIPTION

Ready for use. Renewable raw material-based. V.O.C free, petroleum-based solvent free, chlorine free, EDTA free, glycol free. MOSH-MOAH and POSH free cleaner. KL 9 H is registered by NSF International, in category A1. This indicates that it is authorized for use in incidental contact with food. (N°162092).

USE

Easily removes greases, oils and sludge, waxy or oily rust preventatives in agro-food industries. Can be sprayed, used in a tank, with a brush, with cloths, in floor washers and part-washers.

TECHNICAL DATA

Operating temperature range: 0°C to +100°C
PH : 8,90- 9,00

PACKING		REF
750 ML	TRIGGER SPRAY	KL9HPULVE
5 L	JERRYCAN	KL9H5L
20 L	JERRYCAN	KL9H20
200 L	PLASTIC DRUM	KL9HFT



KLW 10

WATER-BASED CLEANER WITH GREAT DEGREASING POWER

DESCRIPTION

Ready-to-use water-based industrial cleaner (mechanical parts, chains, bearings, filters, floors, machines, moulds and dies etc...). Formulated with easily biodegradable surfactants. Contains corrosion inhibitors. Compatible with aluminum and other metals due to its pH value.

USE

Takes off and removes industrial dirt such as grease, cutting oils, oily or waxy temporary protections. Its low surface tension facilitates deep cleaning of floors and machines. Low foaming, it can be used in scrubber machines and high pressure cleaners.

TECHNICAL DATA

• Operating temperatures: 0 to 100°C
PH : 8,60

PACKING		REF
5 L	JERRYCAN	KLW105L
20 L	JERRYCAN	KLW1020
200 L	DRUM	KLW10FT



KL BIO

ECOFRIENDLY BITUMEN AND TAR REMOVAL CLEANING AND DEGREASING AGENT

DESCRIPTION

Emulsifiable fluid, V.O.C free Comprised exclusively of renewable products (synergy of fatty acid esters of sunflower, coconut, etc.). Odourless and without safety labelling. Can be used pure and rinsed off with water.

USE

Bitumen and tar removal cleaning and degreasing agent. Can be used on a cloth, in a degreasing fountain (fitted with diaphragm pumps), by sprinkling, or by immersion.

TECHNICAL DATA

• Flash point: > 150 °C
Indice KB : > 60
RRM: >95%

PACKING		REF
5 L	JERRYCAN	KL BIO5L
20 L	JERRYCAN	KL BIO20
200 L	DRUM	KL BIOFT

ANTI-STICK WELDING AGENTS



ADS 530

AQUEOUS ANTI-STICK WELDING AGENT

DESCRIPTION

The lubricant base contains more than 60% of biobased raw materials. Prevents spatter from sticking. Does not stain parts. Is easily washable with water-based or solvent-based cleaners. Anti-rust protection.

USE

Ready to use. Can be used for the protection of all parts or sheets surrounding the parts to be welded, on all surfaces, for all welding methods. Compatible with paints and galvanizations. Can be applied by brush, manual sprayer or automatic sprayer.

TECHNICAL DATA

• Operating temperature: 0 to 100°C
Solubility in water: Fully soluble

PACKING		REF
200 L	DRUM	ADS530FT
5 L	JERRYCAN	ADS5305L
20 L	JERRYCAN	ADS53020L

DÉGRIPPANTS SANS C.O.V.



TOP LUB

ECOFRIENDLY LUBRICATING PENETRATING OIL

DESCRIPTION

It's a clean lubricant free from baryum, silicone, animal or vegetal fat. Thanks to a low surface tension, it penetrates into all seized mechanisms to easily loosen pieces, tools and oxidized parts. Lasting rust preventative effect for any machined or cut parts during transportation or warehousing. Its dielectric rigidity enables it to be used on electrical devices and equipment. Compatible with most elastomers (PTFE, Viton, NBR, FPM).

USE

Loosen oxidized parts. Lubrication of guides, slides, cables, hinges, axes, locks in very dusty and damp environment. Protects machined pieces, bedways, moulds, fundery tools, plastic injection tools. Cleans and protects electrical and electronical equipment.

TECHNICAL DATA

- Biodegradable raw materials > 85%
- Renewable raw material > 50%

PACKING		REF
210 / 150 ML	AEROSOL	TOPLUBA0
5 L	JERRYCAN	TOPLUB5L
250 ML	TRIGGER SPRAY	TOPLUBPULVE

COMPRESSED AIR LUBRICANT



AIR S22 AL

OIL FOR FRL CIRCUIT, MOSH / MOAH / POSH FREE

DESCRIPTION

For a clean lubrication operation of compressed air tools, pumps and compressed air appliances. Better performance for mechanisms. Approved by 2probability.eu, in category H1 Registration CA1824301.

USE

Lubrication of all compressed air circuits and protection of pumps, compressed air tools and appliances operating with compressed air in all moist, dusty, corrosive and hot conditions.

TECHNICAL DATA

- Operating temperature range: -20°C to +150°C
- Viscosity @ 40°C: 22 cst
- MPR > 80%

PACKING		REF
1 L	CAN	AIRS22ALB1
5 L	CAN	AIRS22AL5L

HIGH TEMPERATURE LUBRICANTS



P 716

ANTI-STICKING LUBRICANT ECOFRIENDLY & FOOD GRADED

DESCRIPTION

Synthetic and multipurpose lubricant that can be used for assembling, releasing, un moulding and lubricating operations in any kind of industries such as agrofood or automotive. Free from any mineral resources: exclusively formulated from renewable materials. MOSH-MOAH and POSH free lubricant. P 716 is registered by NSF International, in category H1. This indicates that it is authorized for use in incidental contact with food. (N°162094).

USE

PET bottles lubrication. Lubrication of preforms. Any kind of anti-sticking application, mould releasing process etc...

TECHNICAL DATA

- Operating Temperatures range: -20°C to 200°C
- Viscosity @ 40°C: 42-50 cst
- 100% of "easily biodegradable" raw material (OECD 301)
- Renewable raw material: > 80%

PACKING		REF
20 L	JERRYCAN	P71620

NEAT OILS



LUBA 21

ECOFRIENDLY LUBRICANT FOR PROFILING AND LIGHT CUTTING OPERATIONS

DESCRIPTION

Cold forming chlorine-free fluid. Designed to replace solvanted oils and mineral based fluids. Made from vegetal synthetic esters, it possesses an outstanding wetting power allowing better parts finishings and longer tools lifetime. LUBA 21 contains 86% USDA certified biobased content

USE

Specifically designed for cutting, bending, punching, stamping operations. Highly suitable for sawing, drilling and threading operations. Recommended for light stamping.

TECHNICAL DATA

- Viscosity @ 40°C: 4-6 cst
100% of "easily biodegradable" raw material (OECD 301)
MPR : 86%

PACKING		REF
20 L	JERRYCAN	LUBA2120
200 L	DRUM	LUBA21FT



LUBA 251

ECOFRIENDLY LUBRICANT FOR CUTTING AND LIGHT STAMPING OPERATIONS

DESCRIPTION

Cold forming chlorine-free fluid. Designed to replace solvanted oils and mineral based fluids. Made from vegetal synthetic esters, it possesses an outstanding wetting power allowing better parts finishings and longer tools lifetime.

USE

LUBA251 can be used on any material: aluminum, steel, stainless steel. It is suitable for any coldforming operations. can be applied by rollers, droplets, MQL systems.

TECHNICAL DATA

- Viscosity @ 40°C: 8-10 cst
100% of "easily biodegradable" raw material (OECD 301)
MPR : > 45%

PACKING		REF
20 L	JERRYCAN	LUBA25120
200 L	DRUM	LUBA251FT



LUBA 40

ECOFRIENDLY EXTREME PRESSURE LUBRICANT FOR CUTTING AND STAMPING OPERATIONS

DESCRIPTION

Cold forming chlorine-free fluid. Designed to replace solvanted oils and mineral based fluids. Made from vegetal synthetic esters, it possesses an outstanding wetting power allowing better parts finishings and longer tools lifetime.

USE

Specifically designed for severe stamping operations for any material: steel, stainless steel, aluminum and alloys. Suitable for threading, machining operations.

TECHNICAL DATA

- Viscosity @ 40°C: 6-10 cst
> 80% of "easily biodegradable" raw material (OECD 301B)
RRM: > 70%

PACKING		REF
200 L	DRUM	LUBA40FT



LUBA 501

ECOFRIENDLY EXTREME PRESSURE LUBRICANT TAPPING, CUTTING AND DEEP-DRAWING OPERATIONS

DESCRIPTION

VOC-Free and chlorine-free lubricant for metal cold forming operations. Specifically designed to replace mineral based neat oils. LUBA 501 is formulated from vegetal esters and EP additives. Its outstanding wetting and lubricating power helps improving parts surface and tools lifetime. LUBA 501 is designed for deep-drawing, cutting, drilling, tapping and threading operations that are usually made with chlorinated fluids. LUBA 501 helps reducing chemical hazards and improving environmental protection. LUBA 501 also helps reducing fluids consumption and improving productivity. It's very low viscosity enables easy cleaning and the residual layer is fully thermodegradable.

USE

LUBA 501 is specifically designed for machining copper and alloys. LUBA 501 is particularly suitable for severe operations such as cutting or deep-drawing operations with any material: steel, HLE steel, stainless steel, aluminium and alloys, copper and alloys. Application with felt rollers (ROLLER LINE) or spraying systems.

TECHNICAL DATA

- Kinematic viscosity 40°C : 60 cst
> 50% of «easily biodegradable» raw material (OECD 301)
RRM : > 80%

PACKING		REF
200 L	DRUM	LUBA501FT
20 L	JERRYCAN	LUBA50120



CONDITIONNEMENT	REF
FUT 200 L	LUBA200FT_

LUBA 200

LUBRIFIANT EXTRÊME PRESSION ÉCORESPONSABLE EMBOUTISSAGE PROFOND

DESCRIPTION

Lubrifiant de déformation à froid des métaux sans chlore et sans C.O.V. Spécialement conçu pour remplacer les huiles entières d'origine minérale de fortes viscosités. Formulé à base d'esters végétaux, additivé extrême pression et agents d'onctuosité, son excellent pouvoir mouillant et lubrifiant permet d'améliorer les états de surface des pièces et la tenue des outils.

UTILISATION

Pour des opérations d'emboutissage profond avec et sans étréage sur tous types de matières : acier, acier HLE, inox, aluminium et alliages, cuivre et alliages. Dans le cas d'usage sur des matériaux cuivreux, procéder à un dégraissage rapide des pièces après opération. Peut être également employé pour des opérations de perçage et de taraudage sur l'inox et l'inconel.

DONNÉES TECHNIQUES

- Viscosité à 40°C : 200 cst
- > 65% de MP "facilement biodégradables" (OECD 301)
- MP renouvelables > 60%



CONDITIONNEMENT	REF
JERRYCAN 20 L	LUBA1620
FUT 200 L	LUBA16FT

LUBA 16

LUBRIFIANT ÉCORESPONSABLE POUR PROFILAGE ET DÉCOUPAGE LÉGER

DESCRIPTION

Lubrifiant de déformation à froid des métaux sans chlore, sans soufre et sans C.O.V. Spécialement conçu pour remplacer les fluides évaporables et les huiles légères d'origine minérales. Formulé à base d'esters végétaux, son excellent pouvoir mouillant et lubrifiant vous permet d'améliorer les états de surface de vos pièces et la tenue de vos outils. Laisse un mince film gras non carbonisant entièrement thermodégradable (courbe ATG disponible sur demande) Ne laisse aucune trace ni résidu...

UTILISATION

LUBA 16 est utilisable sur tous types de matières : aluminium, cuivre et alliages, aciers, électrozingués et inox. Lubrifiant spécialement adapté aux opérations de découpages, de pliages, poinçonnages, cintrages et profilages. Idéal pour les travaux de sciage, perçage et taraudage. Convient également pour des emboutissages légers. Application par : pulvérisation, goutte à goutte, systèmes de lubrification à rouleaux (ROLLER LINE)

DONNÉES TECHNIQUES

- Viscosité cinématique à 40°C : 9- 11 cst
- MPR : 100%



CONDITIONNEMENT	REF
JERRYCAN 20 L	HVG20_
FUT 200 L	HVGFT

H VG

HUILE VÉGÉTALE POUR CONTACT ALIMENTAIRE DIRECT, GARANTIE SANS MOSH / MOAH ET SANS POSH

DESCRIPTION

Lubrifiant propre et polyvalent préconisé pour des opérations de lubrification, de découpage ou d'emboutissage léger dans tous domaines d'activités spécifiquement dans les industries alimentaires et agroalimentaires. Garanti sans silicone, sans allergènes (réglementation UE 1169/2011) et sans OGM. Evite l'adhérence des denrées alimentaires sur les équipements de fabrication. Garanti sans MOSH / MOAH et sans POSH. H VG est enregistré par le NSF International, dans les catégories H1 et 3H. Cela indique qu'il est autorisé pour l'utilisation lors de contacts direct et indirect avec les aliments. (N°162091). H VG contient 100% de contenu biosourcé certifié USDA.

UTILISATION

Pour le découpage d'anneaux aluminium et acier. Produit idéalement préconisé pour toutes opérations de déformations à froid des métaux, boîtes de conserves, capsules, couvercles et tous types d'emballage métallique. Lubrification de tapis et de chaînes de transfert des aliments.

DONNÉES TECHNIQUES

- Viscosité à 40°C : 40 cst
- 100% de MP "facilement biodégradables" (OECD 301)

HUILES SOLUBLES



CONDITIONNEMENT	REF
JERRYCAN 20 L	SOLESTER530M20
JERRYCAN 5 L	SOLESTER530M5L
FUT 200 L	SOLESTER530MFT
CONTAINER 1000 L	SOLESTER530MCO

SOLESTER 530 M

MICROÉMULSION MULTI-MATIÈRES COMPATIBLE AVEC TOUS LES ALLIAGES CUIVREUX

DESCRIPTION

Lubrifiant pour le travail des métaux, entièrement soluble dans l'eau, obtenu par synergie entre la chimie verte et la chimie des polyesters. Grande innocuité pour les opérateurs : formulé sans huile minérale, sans C.O.V., exempt de chlore, phosphore et garanti sans amine secondaire et sans libérateur de formol.

UTILISATION

Utilisation de 2% à 8% pour tous types d'usinages. Utilisation de 1 à 2% pour la rectification. Utilisation pure ou en dilution jusqu'à 30% pour emboutissage profond.

DONNÉES TECHNIQUES

- Viscosité à 40°C : 20 cst

READY-TO-USE AQUEOUS FLUIDS



SOLESTER 77

AQUEOUS FORMING FLUID

DESCRIPTION

Vegetable polymer based ready-to-use aqueous fluid, V.O.C free, non-flammable. Non hazardous (very safe for operators). Compatible with all types of metal, including copper and its alloys.

USE

Zinc-plated electro-galvanised steel profiling. Cutting and stamping without drawing out Stainless-steel rolling (manufacturing chimney sheaths). Manufacture of profiles of the gypsum panel type. Manufacture of vineyard posts

TECHNICAL DATA

- Flash point: without
- RRM: 8%

PACKING	REF	
20 L	JERRYCAN	SOLESTER7720
200 L	DRUM	SOLESTER77FT



SOLESTER 600

MICROÉMULSION MULTI-MATIÈRES PRÊTE À L'EMPLOI POUR PROFILAGE, USINAGE, DÉFORMATION

DESCRIPTION

Lubrifiant pour le travail des métaux, entièrement soluble dans l'eau, obtenu par synergie entre la chimie verte et la chimie des polyesters. Grande innocuité pour les opérateurs : formulé sans huile minérale, sans C.O.V., exempt de chlore, phosphore et garanti sans amine secondaire, sans libérateur de formol et sans métaux lourds. Protection efficace des pièces, des outils et des machines contre la corrosion.

Microémulsion sans huile minérale ayant l'avantage lors de l'utilisation de garder les machines et leur environnement propre. Les pièces obtenues sont propres et non collantes.

USE

Profilage de tous types de matières : acier galvanisé et électrozingué, aluminium, cuivre et laiton. Usinage, filetage, taraudage, perçage, tournage, fraisage sur tous types de métaux (ferreux, cuivreux et aluminium).

TECHNICAL DATA

- Flash point: Without
- PH : 8-10

PACKING	REF	
20 L	JERRYCAN	SOLESTER60020
200 L	DRUM	SOLESTER600FT

DRILLING - TAPPING



LUBA 50/1

ECO-FRIENDLY FLUID FOR TAPPING, DRILLING AND MACHINING

DESCRIPTION

Designed to replace chlorinated mineral oils for threading and drilling, tapping operations. Made from vegetal esters, it possesses outstanding wetting power. It increases tools lifetime and improves parts finishings.

USE

For drilling, tapping and machining of high-strength, extra-hard, thermal and heat-resistant steels, stainless steels, chip removal on small diameters, blind holes, metals with a low machinability index on automatic or semi-automatic machines. Can be used in confined spaces.

TECHNICAL DATA

- Kinematic viscosity 40°C : 60 cst
- > 50% of "easily biodegradable" raw material (OECD 301)
- RRM : > 80%

PACKING	REF	
250 ML	BOTTLE	LUBA50/1FL



VG CUT 77

DRILLING AND TAPPING ECOFRIENDLY WATER-BASED LUBRICANT

DESCRIPTION

Ready-to-use aqueous fluid without V.O.C. non-flammable, V.O.C free Vegetable polymer-based. Odourless. No smoke emissions. Compatible with all types of metal, including copper and its alloys. Easy to degrease.

USE

For drilling and tapping.

TECHNICAL DATA


- non-flammable

PACKING	REF	
650 / 400 ML	AEROSOL	VG CUT77A2

LUBRICATION SYSTEMS

A comprehensive range of lubrication systems and accessories,
adapted to all industrial requirements.

- ▶ WORKSHOP EQUIPMENT
- ▶ SINGLE POINT LUBRICATORS
- ▶ PROGRESSIVE CENTRALIZED LUBRICATION SYSTEMS
- ▶ DUAL LINE GREASING SYSTEMS
- ▶ ACCESSORIES AND OFFSET LUBRICATION POINTS
- ▶ PARTS WASHER
- ▶ ROLLER LINE
- ▶ MQLS AND CHAIN LUBRICATION

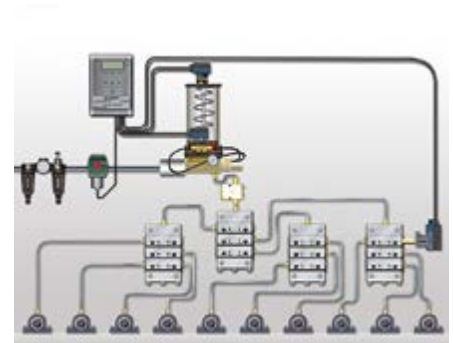

- ▶ SERVICES: Custom-made survey with a trained team
On-site delivery and installation
Training
After-sales service
Maintenance contract



A French company on a human scale engaged in certification and approval processes, MOLYDAL continues to consolidate its presence in Europe and pursue its development worldwide. The company's know-how has enabled it to offer a complete range of products and equipment intended for all business sectors (Metalwork, food industries, sugar industries, iron industry, granulation industry, plastic injection, automotive, energy, etc.), where certain approvals are sometimes required (PMUC, NSF, etc.).

THE MOLYDAL VALUES

- Quality policy with a product range designed in compliance with all regulations in force.
- Environmental policy with an eco-responsible product range, with performance equal or superior to current oil solutions.
- Innovation policy with the formulation and testing of the products of tomorrow by the integrated R&D laboratory.

THE MOLYDAL OBJECTIVES

- Pursue the development of the products and materials range to help industries to optimize the profitability of their processes.
- Pursue the company's partnership with various industries to optimize its range of products adapted to the specific features and/or the constraints of manufacturing processes.

THE MOLYDAL SERVICES

- Technical solutions to specific industrial problems: customised recommendations and analysis.
- Responsive teams nearby for a personalised local service.
- The resumption of our chlorinated and non-chlorinated used products (field in keeping with waste recovery).

A professional brand offered exclusively by the group companies



Molydal's Quality, Health, Safety and Environment management system is ISO 9001 and MASE certified, a guarantee of compliance with health, safety and environmental rules on our site and during on-site interventions.



Z.A.E.T - 221, rue Paul Langevin - 60740 Saint-Maximin - FRANCE

Tél : +33 (0)3 44 61 76 76 Fax : +33 (0)3 44 25 17 78

www.molydal.com Contact : molydalexport@molydal.com