



09 THE SELECTION

2024 EDITION



SAFETY - TOOLS - CUTTING TOOLS - POWER

f in ficodis.com

Contact us :





FICODIS



SAFETY



TOOLS



CUTTING
TOOLS



POWER

Our strengths



Extensive product ranges

Access to a wide variety of industrial products



Availability

Product accessibility thanks to a powerful network



Proximity

Many points of sale in Ontario, Québec and northeastern U.S.




Expertise

Technical knowledge and skill



Performance solutions

Customizable support services

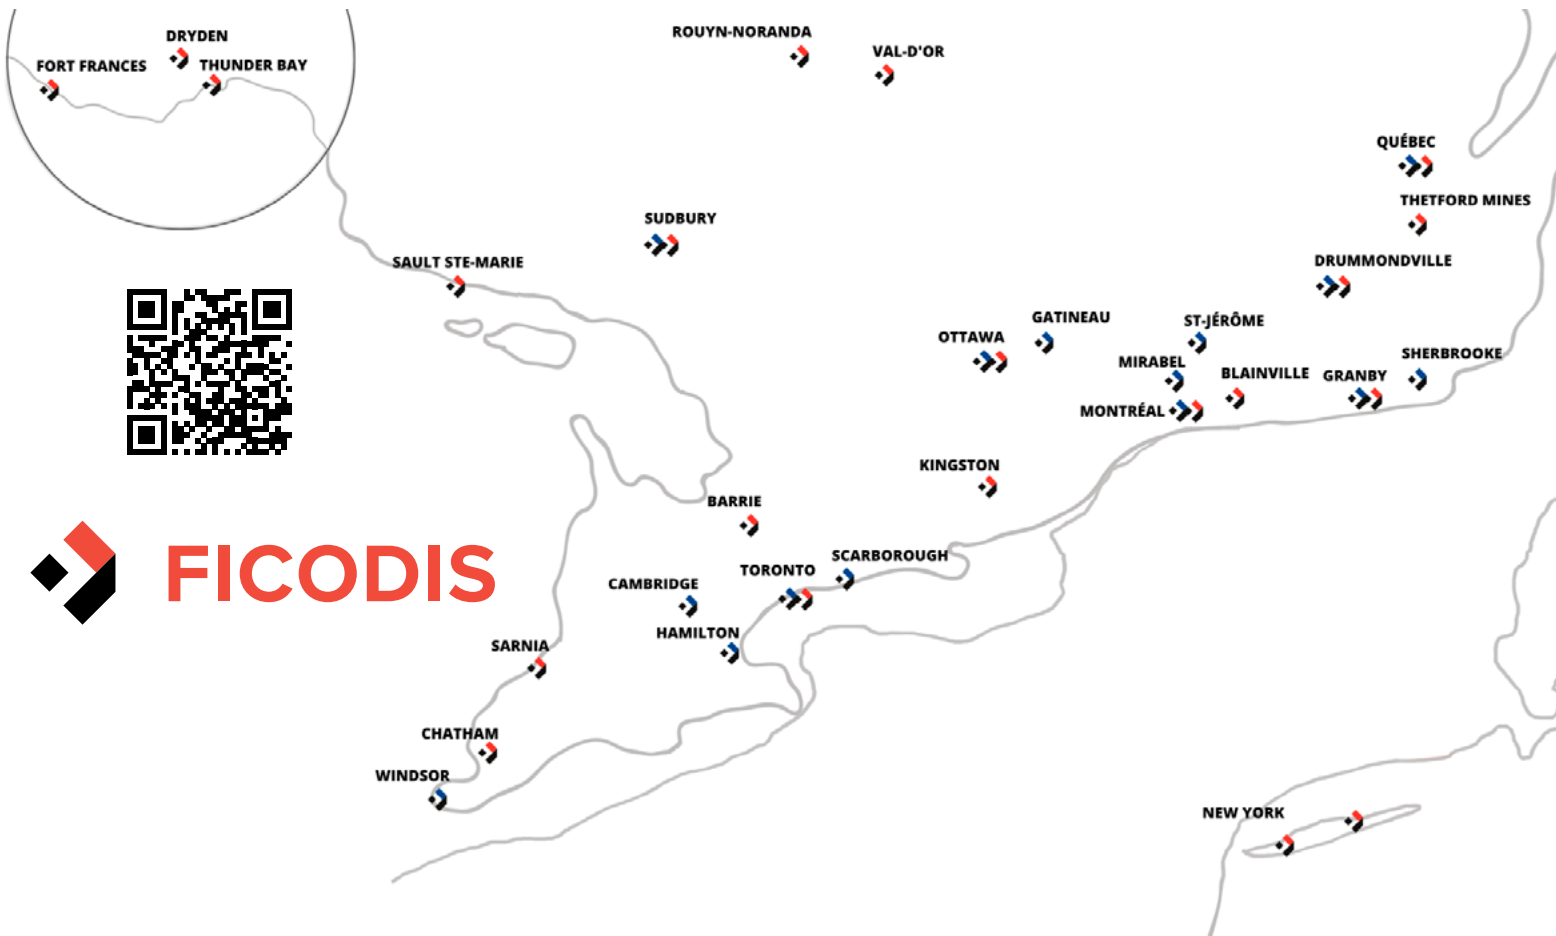

FICODIS

WARNING: The information contained in this catalogue is provided "as is" for information purposes only and without guarantee of accuracy, completeness or any other guarantee. It could contain inaccuracies, imprecisions, typographical errors, printing errors. Some products may not be exactly as shown on the photos. Ficodis thus can not be held responsible of any inaccuracies, imprecisions, typographical or printing errors. In addition, Ficodis can make improvements and/or changes to the products described in the catalogue at any moment, as well as discontinue some products. Ficodis cannot be held responsible for any improvement, change or discontinuity of the products.

This product catalogue presents only an overview of the products listed. It does not contain instructions or cautionary statements. At no time the information found within this catalogue as well as the advice and remarks made about the products should be considered as advice or safety measures to be taken in connection with their use. The product user is responsible for reading and following the instructions of the user manual. Non-compliance with the guidelines can result in serious injury, or death. Ficodis' responsibility can in no way be engaged for any direct, indirect, material, immaterial, consecutive or non-consecutive prejudice resulting from the information communicated.

SUMMARY



SAFETY

p. 5



Gloves
Glasses
Respirators and filters
Barricade tapes
Overalls
First aid kits
Harness and fall limiter
Vests
Hard Hats
Earplugs



TOOLS

p. 11



Lifting
Drills and screwdrivers
Tool sets
Grinders and grinding wheels
Chainsaw
Nails and nailers
Foams
Air compressors
Hammers
Screwdrivers
Bottle jacks



CUTTING TOOLS

p. 21



Discs and pads
Retainer nuts
Magnetic drills
Annular cutters
Pilot pins
Calipers
Saw blades
Drills
Carbide inserts
Countersinks
Taps
Monobloc milling cutters



POWER

p. 29



Roller chains
Gear boxes
Casters
Greases and lubricants
Self-aligning bearings
Bearing Heater
Greases and lubricators
Valves
Blowguns
Hose reels
Couplers
Torque wrenches
Hydraulic pumps
Hydraulic cylinders
Speed and frequency inverters
Motors




SERVICES

p. 39





CROMSON

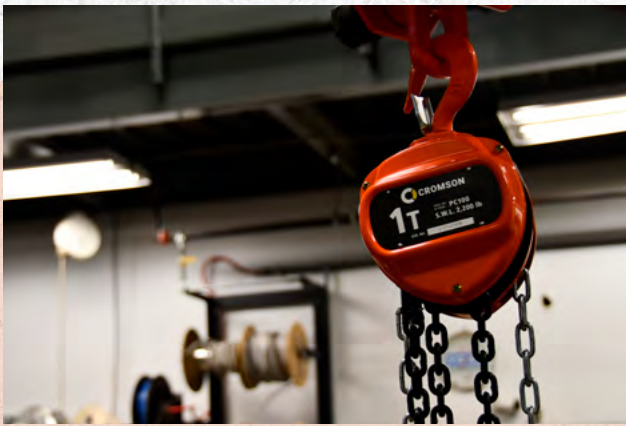

PSIAL



FIXATIONS • FASTENERS



LION




MOLYDAL



SAFETY

- GLOVES
- GLASSES
- RESPIRATORS AND FILTERS
- BARRICADE TAPES
- OVERALLS
- FIRST AID KITS
- HARNES AND FALL LIMITER
- VESTS
- HARD HATS
- EARPLUGS



A revolution at your fingertips



KYORENE®
THE GRAPHENE FIBER



Range KYORENE®
GREASY AND OILY ENVIRONMENTS

OPSIAL



SAFETY



"BILLY" Goatskin Leather Driver's Gloves

Goatskin leather is supple yet highly resistant to abrasion and wear. Perfect for achieving a great fit, a high degree of dexterity and long-lasting wearability - Keystone thumb design for improved fit. Suitable for medium and heavy handling in dry environment.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| CR8404 | 9900005137 | S |
| CR8405 | 9900005138 | M |
| CR8406 | 9900005139 | L |
| CR8407 | 9900005140 | XL |
| CR8408 | 9900005141 | XXL |



Certification :



"BILLY-K" Driver's Gloves

Abrasion and wear. Resistant goatskin. Provides great fit, dexterity, and durability. Kevlar® lined meets ANSI A5 cut resistance rating. Keystone thumb design for improved fit. Made from wear-resistant goat grain leather. Just the right size, high dexterity and long-lasting comfort.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| CR8409 | 9900005142 | M |
| CR8410 | 9900005143 | L |
| CR8411 | 9900005144 | XL |



Certification :



"BUCK" welding gloves

Kevlar® lined meets ANSI A4 cut resistance rating and ARC 4 Rating. Goatskin leather is supple yet highly resistant to abrasion and wear. Gauntlet cuffs for added wrist protection. Dupont Kevlar® thread stitching.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| CR8430 | 9900005205 | S |
| CR8431 | 9900005206 | M |
| CR8432 | 9900005207 | L |
| CR8433 | 9900005208 | XL |
| CR8434 | 9900005209 | XXL |



Certification :



"HANGRIP PLUS" Handling gloves

Glove suitable for light handling and precision handling in greasy or damp environments. Seamless 13 gauge nylon knitted glove. Double black nitrile coating on palm and fingertips. Exceptional grip thanks to POWERFINISH® Technology. Optimum comfort and dexterity. High abrasion resistance.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| P702LG4-S6 | 8800000017 | XS |
| P702LG4-S7 | 8800000018 | S |
| P702LG4-S8 | 8800000019 | M |
| P702LG4-S9 | 8800000020 | L |
| P702LG4-S10 | 8800000015 | XL |
| P702LG4-S11 | 8800000016 | XXL |



Certification :



"HANDLITE 300N" Handling gloves

Glove suitable for light handling and precision assembly in greasy or damp environments. Grey polyamide knitted glove, 13 gauge, seamless. Black nitrile coating on palm and fingertips. Good tear resistance, high abrasion resistance.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| P702723-S6 | 8800000077 | XS |
| P702723-S7 | 8800000078 | S |
| P702723-S8 | 8800000079 | M |
| P702723-S9 | 8800000080 | L |
| P702723-S10 | 8800000081 | XL |



Certification :



"HANDLITE 410N" Handling gloves

Gloves suitable for light handling and precision handling in greasy or damp environments. Seamless 13 gauge nylon knitted glove. Double black nitrile coating on palm and fingertips. Exceptional grip thanks to POWERFINISH® Technology. Optimum comfort and dexterity. High abrasion resistance.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| P702LK0-S6 | 8800000093 | XS |
| P702LK0-S7 | 8800000094 | S |
| P702LK0-S8 | 8800000095 | M |
| P702LK0-S9 | 8800000096 | L |
| P702LK0-S10 | 8800000097 | XL |



Certification :






OPSIAL

“HANDLITE 195NR” handling gloves

Glove suitable for light handling and precision assembly in dry conditions. Black polyester knitted gloves, 13 gauge, seamless. Black polyurethane coating on palm and fingertips. Excellent dexterity, good abrasion resistance, suitable for dirty environments.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| P70H0H6-S7 | 8800000178 | S |
| P70H0H6-S8 | 8800000179 | M |
| P70H0H6-S9 | 8800000180 | L |
| P70H0H6-S10 | 8800000181 | XL |
| P70H0H6-S11 | 8800000182 | XXL |

Certification :




“TenActiv™” high performance gloves

Black knit hides dirt and stains to increase durability. 360° cut protection with low-lint TenActiv™ technical yarn and ANSI A4 cut resistance. Polyurethane palm coating for stable dry grip and tactile feel.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| STAGBPU-07 | 0000096271 | S |
| STAGBPU-08 | 0000096272 | M |
| STAGBPU-09 | 0000096273 | L |
| STAGBPU-10 | 0000096270 | XL |
| STAGBPU-11 | 0000120297 | XXL |

Certification :



DEXTERITY® Shock-Resistant gloves

Liquid and oil resistant. Hands stay dry due to micropore nitrile coating. Protection with the comfort of cotton. Improved grip in wet and oily conditions. Snug fit, breathable and ergonomically shaped. Back-of-hand protection without compromising on flexibility or dexterity.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| S15GPNVB-6 | 0000150400 | XS |
| S15GPNVB-7 | 0000150401 | S |
| S15GPNVB-8 | 0000150402 | M |
| S15GPNVB-9 | 0000150403 | L |
| S15GPNVB-10 | 0000150397 | XL |
| S15GPNVB-11 | 0000150398 | XXL |
| S15GPNVB-12 | 0000150399 | XXXL |

Certification :



“TenActiv™” hi-viz gloves

Highly flexible 18-gauge knit conforms to the hand for bare-hand feel. Foam nitrile palm coating.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| S18TAXFN-T6 | 0000162665 | XS |
| S18TAXFN-T7 | 0000162666 | S |
| S18TAXFN-T8 | 0000162667 | M |
| S18TAXFN-T9 | 0000162668 | L |
| S18TAXFN-T10 | 0000162669 | XL |
| S18TAXFN-T11 | 0000162670 | XXL |
| S18TAXFN-T12 | 0000162671 | XXXL |

Certification :



Accuris™ Series CSA Spoggle Style Safety Glasses



Sporty straight-back temple design that workers love. FR Rated inner foam padding for tight seal prohibits debris from entering the eyes (spoggle). Impact resistant polycarbonate lens with scratch resistant coating - Blocks 99% of harmful UV light. Rubber nosepiece for non-slip comfortable fit.

| # Manufacturer | # Ficodis | Lenses |
|----------------|------------|----------------|
| SB8710DTP | 0000120289 | clear |
| SB8720DTP | 0000120290 | smoked |
| SB8725DTP | 0000120291 | indoor/outdoor |
| SB8770DTP | 0000120292 | mirrored |

Certification :

CSA Z94.3-20



SecureFit™ Protective Eyewear



Transparent lenses.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 7100090435 | 0000162672 |

Certification :

CSA Z94.3



SAFETY



Half-mask respirator

Economy-grade rubber mask.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|--------|
| 6100 | 0000027997 | Small |
| 6200 | 0000028000 | Medium |
| 6300 | 0000028002 | Large |



Certification :

NIOSH standards



Half-mask respirator with quick-release coupling

Quick-locking, resilient silicone face seal, bayonet connection. Available in various sizes.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|--------|
| 6502QL | 0000028003 | Medium |



Certification :

NIOSH standards



Respiratory filters and cartridges

| # Manufacturer | # Ficodis | Filters / Cartridges |
|----------------|------------|----------------------------------|
| | 0000027936 | P100 w/ nuisance level OV relief |
| | 0000028019 | P100 |
| | 0000027992 | OV / P100 Comb. |



Certification :

NIOSH standards



First aid kits - Type 2

BASIC (more than 2 people OR low-moderate risk OR more than 30 minutes from medical facility).

| # Manufacturer | # Ficodis | Size |
|----------------|------------|----------------------|
| CR8002 | 9900004860 | Medium - Plastic box |
| CR8003 | 9900004857 | Large - Plastic box |
| CR8004 | 9900004859 | Large - Metal box |

Certification :

CSA Z1220-17



Barricade Tape



Dispenser Box.
1.4 mil thick.
3 in. X 1000 ft. Roll.

| # Manufacturer | # Ficodis | |
|----------------|------------|-----------------------------|
| CR8700 | 9900006728 | Red : «DANGER DO NOT ENTER» |
| CR8701 | 9900006729 | Yellow : «CAUTION» |
| CR8702 | 9900006730 | Red : «DANGER» |
| CR8703 | 9900006731 | Yellow : «DANGER» |



Disposable Microporous Coveralls

Standards : ASTM 1670 & 1671. Lightweight & economical. Zipper closure and serged seams. Elastic wrists, ankles and attached hood
Suitable for use in a wide range of environments where hazardous or non-hazardous contaminants may be present. Microporous film laminated to spunbonded polypropylene (SBPP).
High Moisture Vapour Transmission Rate (MVTR) for superior breathability and worker comfort.

| # Manufacturer | # Ficodis | Size |
|----------------|------------|------|
| CR428-M | 9900006370 | M |
| CR428-L | 9900006371 | L |
| CR428-XL | 9900006372 | XL |
| CR428-2XL | 9900006373 | 2XL |
| CR428-3XL | 9900006374 | 3XL |
| CR428-4XL | 9900006375 | 4XL |





V-TEC™ Personal Fall Limiter 6'

Swivel anchor loops and carabiner.
Aluminum locking hooks for rebar.
Only 1.3 kg (2.8 lbs).
Length 1.8 m (6 ft).

| # Manufacturer | # Ficodis |
|----------------|------------|
| VTOHW-011-ZA-C | 0000120269 |

Certification :

CSA Z259.2.2-17



V-FORM™ Basic Full-Body Harness

Single D-Ring tongue & buckle leg closures
Quick connect chest buckles

| # Manufacturer | # Ficodis |
|----------------|------------|
| 10206058 | 0000120267 |

Certification :

CSA Z239.10

Full-body harnesses



Hi-vis FR Safety vest

Functional high-visibility vest, 4 pockets, 5-point tear away features velcro fasteners.
Hanging loop for gas detector / walkie-talkie.
Harness access opening on the back. Flame retardant.



Lime :

| # Manufacturer | # Ficodis | Size |
|----------------|------------|----------|
| P70IW59-SM | 8800000189 | S / M |
| P70IW59-L/XL | 8800000190 | L / XL |
| P70IW59-2/3XL | 8800000191 | 2 / 3 XL |
| P70IW59-4/5XL | 8800000192 | 4 / 5 XL |

Orange :

| # Manufacturer | # Ficodis | Size |
|----------------|------------|----------|
| P70JIXF-SM | 8800000185 | S / M |
| P70JIXF-L/XL | 8800000186 | L / XL |
| P70JIXF-2/3XL | 8800000187 | 2 / 3 XL |
| P70JIXF-4/5XL | 8800000188 | 4 / 5 XL |



V-GARD® Type 1 Hard Hats

Slotted cap for earmuffs.
Ratcheting suspension.



| | # Manufacturer | # Ficodis | Color |
|---|----------------|------------|-----------|
| ● | 492559 | 0000035860 | Black |
| ● | 475359 | 0000120249 | Blue |
| ● | 802972 | 0000120253 | Navy Blue |
| ● | 475362 | 0000120250 | Green |
| ● | 475364 | 0000120252 | Grey |
| ● | 475361 | 0000120908 | Orange |
| ● | 475363 | 0000120251 | Red |
| ○ | 475358 | 0000028333 | White |
| ● | 475360 | 0000028334 | Yellow |

Certification :

CSA Z94.1-15
Type 1 Class E

If hazard potential is for top impact,
a Type 1 helmet is sufficient.



Yellow Neon Single-Use Earplugs

Uncorded 200 pairs/box.
Tapered polyurethane foam.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 312-1250 | 0000022814 |

Certification :

NRR33

Canada Class A(L)
95 to 105 dba





3M Science.
Applied to Life.™



**With more options.
Secure comfort
is in sight.**

3M™ SecureFit™ 600 Series Protective Eyewear



Secure, comfortable fit
with 3M™ SecureFit™ Pressure Diffusion
Temple (PDT) Technology



Optional readers
with 3M™ Scotchgard™ Anti-fog Coating
and a range of diopters



Durable polycarbonate lenses
absorb 99.9% of UVA and UVB rays



Stylish yet sturdy frame
that meet the requirements of
CSA Z94.3 and ANSI Z87.1



Rugged Anti-scratch Coating (RAS)
helps extend the life of the lens



Long-lasting clarity
Scotchgard™ Anti-fog
Coating retains its effectiveness
for at least 25 washings with soap and water*



Optional removable foam-lined gasket
helps keep debris out of your eyes while
providing comfort and cushioning




Multiple lens colour options
including photochromic and
polarized lenses

* Based on 3M internal testing per EN168 test methods when compared with traditional anti-fog coatings.

TOOLS

- LIFTING
- DRILLS
- TOOL SETS
- GRINDERS AND GRINDING WHEELS
- CHAINSAW
- NAILS AND NAILERS
- FOAMS
- AIR COMPRESSORS
- HAMMERS
- SCREWDRIVERS
- BOTTLE JACKS



CROMSON
Expertise - Quality - Innovation

**6000 +
REFERENCES**

UCAN

FASTENING PRODUCTS



BUILDING LASTING CONNECTIONS
CONSTRUIRE DES CONNEXIONS DURABLES

www.ucanfast.com



Ton chain Hoist CPC series

Capacity of 1/2T, 1T and 2T. ASME B30.16 Certified. Tested at 150% of rated capacity (certificate included). Weston brake system. Triple gear. Exclusive first-grade asbestos-free disc to improve lifetime. High-quality 80 caliber lifting chain, bearings with armoured seals. One-year warranty.

| # Manufacturer | # Ficodis | Ton(s) | Length chain |
|----------------|------------|--------|--------------|
| PC05010 | 9900004806 | 1/2 | 10' |
| PC05020 | 9900004807 | 1/2 | 20' |
| PC10010 | 9900004808 | 1 | 10' |
| PC10020 | 9900004809 | 1 | 20' |
| PC20010 | 9900004810 | 2 | 10' |
| PC20020 | 9900004811 | 2 | 20' |

Certification :

ASME B30.16



Ton lever hoist CPL series

Capacity of 3/4T and 1-1/2T. ASME B30.16 Certified. Tested at 150% of rated capacity (certificate included). Hooks with deformation indicator. Weston brake system. High-quality 80 caliber lifting chain, extend lifetime. One-year warranty.

| # Manufacturer | # Ficodis | Ton(s) | Length chain |
|----------------|------------|--------|--------------|
| PL07505 | 9900004812 | 3/4 | 5' |
| PL07510 | 9900004813 | 3/4 | 10' |
| PL15005 | 9900004814 | 1-1/2 | 5' |
| PL15010 | 9900004815 | 1-1/2 | 10' |

Certification :

ASME B30.16



Ton handtruck CCM series

Capacity of 1T and 2T. ASME B30.11 Certified. Tested at 125% of rated capacity (certificate included). One-year warranty.

| # Manufacturer | # Ficodis | Ton(s) |
|----------------|------------|--------|
| CM1000 | 9900004708 | 1 |
| CM2000 | 9900004709 | 2 |

Certification :

ASME B30.11



Ratchet strap

Polyester. Iron buckle system with double J hook.

Certification :

WSTDA-T1

| # Manufacturer | # Ficodis | Lenght | Width | Breaking point | WLL | Weight |
|----------------|------------|--------|-------|----------------|---------|---------|
| CR7370 | 9900004902 | 16' | 1" | 3000 lb | 1000 lb | 1,72 lb |
| CR7371 | 9900004903 | 27' | 2" | 11000 lb | 3666 lb | 5,33 lb |



Webbing Sling - Type 3 Webbing Sling - 2 ply

Polyester sling resistant to most chemicals. Not resistant to acids, aldehydes, ethers and strong alkaline.



Certification :

WSTDA-T1

| # Manufacturer | # Ficodis | Lenght | Width | Vertical WLL | Choker WLL | Basket WWL |
|----------------|------------|--------|-------|--------------|------------|------------|
| CR7314 | 9900005169 | 4' | 1" | 3100 lb | 2400 lb | 6200 lb |
| CR7300 | 9900004938 | 6' | 1" | 3100 lb | 2400 lb | 6200 lb |
| CR7301 | 9900004939 | 8' | 1" | 3100 lb | 2400 lb | 6200 lb |
| CR7311 | 9900005168 | 10' | 1" | 3100 lb | 2400 lb | 6200 lb |
| CR7302 | 9900004940 | 12' | 1" | 3100 lb | 2400 lb | 6200 lb |
| CR7303 | 9900004941 | 2' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7304 | 9900004942 | 4' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7305 | 9900004943 | 6' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7306 | 9900004944 | 8' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7307 | 9900004945 | 10' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7308 | 9900004946 | 12' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7309 | 9900004947 | 16' | 2" | 6200 lb | 4960 lb | 12400 lb |
| CR7310 | 9900004948 | 20' | 2" | 6200 lb | 4960 lb | 12400 lb |



M18™ REDLITHIUM™ FORGE™ XC6.0 Battery (48-11-1861)

M18 REDLITHIUM FORGE™

HIGH OUTPUT™ 12.0
POWER
SMALLER SIZE

15 MIN
SUPERCHARGE TO 80%

LONGEST
LIFE
VS. REDLITHIUM™

15 MIN
SUPERCHARGE TO 80%
W/ M18™ REDLITHIUM™ FORGE™ XC6.0 BATTERY



M18™ Dual Bay Simultaneous Super Charger (48-59-1815)



M18™ Red Exterior Rotary Laser Level Kit w/ Receiver, Tripod, & Grade Rod (3701-21T)



M18™ Green Interior Rotary Laser Level Kit w/ Remote/ Receiver & Wall Mount Bracket (3702-21)



M18™ Red Exterior Dual Slope Rotary Laser Level Kit w/ Receiver, Remote, Grade Rod & Tripod (3704-21T)

OUTDOOR POWER EQUIPMENT



M18 FUEL™ 17" Dual Battery String Trimmer Kit (3006-22)



M18 FUEL™ Brush Cutter - Tool Only (3015-20)



M18 FUEL™ Telescoping Pole Saw Kit (3013-21)

QUIK-LOK™ ATTACHMENTS

- (49-16-2739) **Cultivator**
- (49-16-2793) **Blower**
- (49-16-2796) **Hedge Trimmer**
- (49-16-2795) **Bed Redefiner**
- (49-16-2794) **Reciprocator**

ONLY COMPATIBLE WITH 2825-20ST

MX FUEL™ REDLITHIUM™ FORGE™ & SUPERCHARGER



UP TO **2X MORE RUN-TIME**
vs REDLITHIUM™ XC406

UP TO **2X FASTER CHARGING**

ML24-10176



MX FUEL™ 70kg Rammer Kit (MXF270-2HD)



MX FUEL™ 20" Plate Compactor Kit (MXF220-2HD)



MX FUEL™ 36" Walk-Behind Trowel Kit (MXF336-3HD)



MX FUEL™ Core Rig w/ Stand Kit (MXF302-2HD)



M18 FUEL™ 2-Tool Combo Kit

Included: (1) M18 FUEL™ 1/2" Hammer Drill/Driver(2904-20). (1) M18 FUEL™ 1/4" Hex Impact Driver(2953-20). (2) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Pack(48-11-1850). (1) M18™ & M12™ Multi-Voltage Charger(48-59-1812). (1) Side Handle. (2) Belt Clip. (1) Blow Molded Case.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 3697-22 | 0000122564 |



18 V LTX - 2 Tool Combo Kit

Included: (1) 1/4" Cordless Impact Driver With Brushless Motor (DTD154Z). (1) 1/2" Hammer Drill / Driver with Brushless Motor (DHP486Z). (2) 18V (5.0 Ah) Li-Ion Batteries BL1850B (196675-2). (1) Rapid Charger (DC18RC). (1) Tool Bag (821010-X).

| # Manufacturer | # Ficodis |
|----------------|------------|
| DLX2412TX1 | 0000121654 |



20 V - 2-Tool Kit

Included : (1) DCD999B 20V MAX* 1/2 in. Brushless Cordless Hammer Drill/Driver. with FLEXVOLT® Advantage™. (1) DCF887 20V MAX*1/4 in. XR® Brushless Cordless Impact Driver. (2) DCB205 20V MAX* Lithium Ion 5.0Ah battery; (1) DCB118 8 Amp Fast Charger. (2) Belt Hooks. (1) Kit Bag.

| # Manufacturer | # Ficodis |
|----------------|------------|
| DCK2100P2 | 0000119426 |



ROLL-ON™ generator

Power output: powers 2 products with 20 A cord. 2.5 kWh REDLITHIUM™ internal battery. Emission-free 3,600W (CONTINUOUS) / 7,200W (PEAK).



| # Manufacturer | # Ficodis |
|----------------|------------|
| 3300R | 0000162723 |



FICODIS.com

Find us in store!

Consult our offers from your computer, tablet or smartphone.

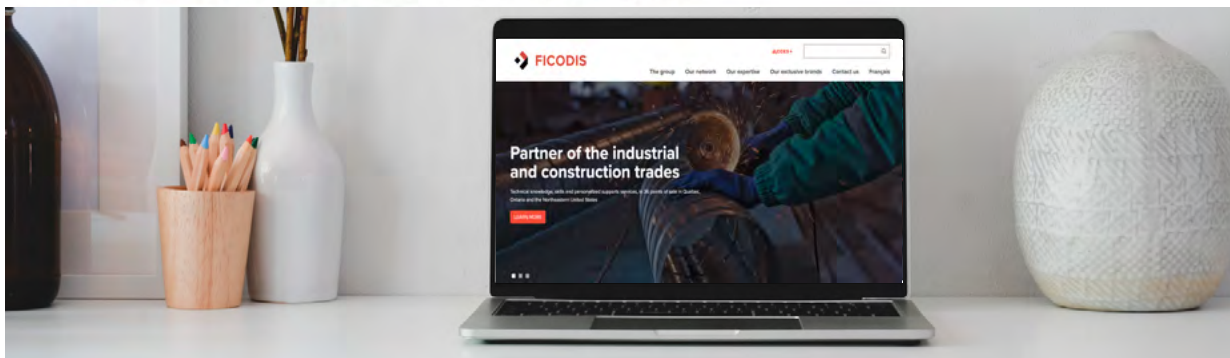

BEYOND THE GRAIN WALTER CERAMIC SOLUTIONS

CUTTING



WALTER's exclusive SMART RESIN™ technology exposes fresh ceramic grains at the optimal time to achieve the most productive balance between sharpness & life in your application.

NEW

ZIP™ XX

Ceramic cut-off wheel for exceptional life and faster cuts



| TYPE 1 | Dia. | Thick. | Arbor | MFG No. | Std. Pkg. |
|--------|--------|--------|-------|---------|-----------|
| | 4 1/2" | 1/8" | 7/8" | 11X242 | 25 |
| | 5" | 1/8" | 7/8" | 11X252 | 25 |
| | 6" | 1/8" | 7/8" | 11X262 | 25 |
| | 7" | 5/8" | 7/8" | 11X272 | 25 |

XCAVATOR™ XX

High performance grinding wheel with ultra-fast removal rate on steel and stainless steel. Fe-Free formulation



| Dia. | Thick. | Arbor | MFG No. | Std. Pkg. |
|---------------------|--------|-------|---------|-----------|
| 1/8" TYPE 27 | | | | |
| 4 1/2" | 1/8" | 7/8" | 08X452 | 10 |
| 5" | 1/8" | 7/8" | 08X502 | 10 |
| 6" | 1/8" | 7/8" | 08X602 | 10 |
| 1/4" TYPE 27 | | | | |
| 4 1/2" | 1/4" | 7/8" | 08X450 | 10 |
| 5" | 1/4" | 7/8" | 08X500 | 10 |
| 6" | 1/4" | 7/8" | 08X600 | 10 |

SANDING



WALTER's exclusive V-STRONG™ backing technology improves durability for the most demanding applications. With more vulcanized fiber than the competition, WALTER ceramic sanding discs last longer.

XTRACUT™

Highest performance sanding discs in steel



| Dia. | Arbor | Extra Coarse | Coarse | Medium |
|--------|-------|--------------|--------|--------|
| 4 1/2" | 7/8" | 15A453 | 15A456 | 15A458 |
| 5" | 7/8" | 15A503 | 15A506 | 15A508 |
| 6" | 7/8" | 15A603 | 15A606 | 15A608 |
| 7" | 7/8" | 15A703 | 15A706 | 15A708 |

Standard package of 25

COOLCUT™ XX

Provides aggressive material removal rates and the longest life on various metals



| Grit | Arbor | 4 1/2" | 5" | 6" | 7" | Std. Pkg. |
|------|-------|--------|--------|--------|--------|-----------|
| 24 | 7/8" | 15X452 | 15X502 | 15X602 | 15X702 | 25 |
| 36 | 7/8" | 15X453 | 15X503 | 15X603 | 15X703 | 25 |
| 50 | 7/8" | 15X455 | 15X505 | 15X605 | 15X705 | 25 |
| 60 | 7/8" | 15X456 | 15X506 | 15X606 | 15X706 | 25 |
| 80 | 7/8" | 15X458 | 15X508 | 15X608 | 15X708 | 25 |
| 100 | 7/8" | 15X460 | 15X510 | 15X610 | 15X710 | 25 |
| 120 | 7/8" | 15X462 | 15X512 | 15X612 | 15X712 | 25 |

FINISHING



WALTER's exclusive MAX LIFE™ cold curing glue ensures the freshest grains possible by eliminating the need to apply heat during the manufacturing process, avoiding micro-cracking and drying out, improving consistency and maximizing disc life.

NEW & IMPROVED

ENDURO-FLEX™ TURBO

100% ceramic grain delivering the fastest removal rate in the industry, now with +25% more life!



| Dia. | Arbor | Grit | MFG No. |
|-------------------------|---------|-------|---------|
| TYPE 27 | | | |
| 4 1/2" | 7/8" | 36/60 | 06A462 |
| 5" | 7/8" | 36/60 | 06A512 |
| TYPE 27S SPIN-ON | | | |
| 4 1/2" | 5/8"-11 | 36/60 | 06A452 |
| 5" | 5/8"-11 | 36/60 | 06A502 |
| 6" | 5/8"-11 | 36/60 | 06A602 |

For more information on these solutions or to schedule a demo please scan.





Super 5™ grinder

Now boasting a 10.5A motor, this grinder is the right choice for those jobs that require extra power from a lightweight tool. This industrial grade power tool is built to last, and when paired with 5" abrasives it provides one of the safest and most productive systems to tackle a wide range of jobs.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 30A150 | 0000108829 |



**ALPHA CUT cut-off wheels
CONCRETE**

High-speed type 41. Silicon carbide abrasive wheel for gas saws. Two layers of reinforcement for increased safety. Designed for cutting bricks, blocks, concrete and other masonry materials.

| # Manufacturer | # Ficodis | Dimension |
|----------------|------------|-------------------|
| MT411418B | 9900000192 | 14" x 1/8 x 20 mm |



ZIPCUT type 1 cut-off wheel

Angle grinder, stainless steel.
Max RPM : 12200.
Standard: ANSI B7.1.
Sold in packs of 25.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 11T052 | 0000039070 |



5" angled grinder

10 Amp motor. Trigger switch with lock button and circuit (CAC/DC). Lightweight design reduces fatigue.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 9005B | 0000162078 |



MX FUEL™ 14" Cut-Off Saw w/ RAPIDSTOP Kit

14" gas performance, no gas headaches.
RAPIDSTOP Blade brake and kickback control.
14 ft. run time in concrete, 120 cuts in #5 rebar per charge.

| # Manufacturer | # Ficodis |
|----------------|------------|
| MXF315-2XC | 0000162724 |





TOOLS



Pneumatic roller roofing nailer

Loader 15 degrees . 1-3/4". 5.5 lb, lightweight and well balanced for easy handling. 5-year limited warranty. Protective goggles included.

| # Manufacturer | # Ficodis |
|----------------|------------|
| NV45AB2 | 0000130546 |



Round head framing nailer

Loader 15 degrees. 3-1/4". 8.8 lbs. Cylinder valve drive system. Rafter hook included. Protective goggles included.

| # Manufacturer | # Ficodis |
|----------------|------------|
| NV83A5 | 0000162722 |



Pneumatic framing nailer

3-1/2". 7.7 lb. Loader 15 degrees +/- 1 degree. Fastener length capacities 1-3/4"- 3-1/2". Protective goggles included.

| # Manufacturer | # Ficodis |
|----------------|------------|
| NV90AG | 0000109082 |



Polyurethane foam LionProFoam

750 ml. Gun version.

Use: Doors and windows
Application temperature: min 5 deg.

| # Manufacturer | # Ficodis |
|----------------|------------|
| LPF0001 | 9910000067 |

NEW

Usage: All seasons
Application temperature: down to -25 deg.



| # Manufacturer | # Ficodis |
|----------------|------------|
| LPF0004 | 9910000068 |



Air compressor Portable gas-powered

8 gallons.
Power output: 5.5 HP at 3,600 rpm.
Weight: 144lb.

| # Manufacturer | # Ficodis |
|----------------|------------|
| EC2510E | 0000162721 |



THE TANK portable electric air compressor

6 gallons.
Power sources: 120 V/60 Hz. 200 pounds per square inch max. Weighs only 41 lb.

| # Manufacturer | # Ficodis |
|----------------|------------|
| EC914SM | 0000150512 |



Nails



| # Manufacturer | # Ficodis | Type | Diam. | Length | Quantity |
|----------------|------------|--------------------------------|-------|--------|----------|
| 02-RT125-LI | 0000130169 | 15 deg Smooth Shank Coil Nails | .120 | 1-1/4" | 7200 |
| 02-BOB325V-LI | 0000162007 | 15 deg Screw Shank Coil Nails | .113 | 3-1/4" | 4500 |
| 02-BOB225V-LI | 9910000024 | 15 deg Screw Shank Coil Nails | .099 | 2-1/4" | 9000 |
| 02-BOB300V-LI | 9910000025 | 15 deg Screw Shank Coil Nails | .113 | 3" | 4500 |
| 02-BOB250V-LI | 9910000026 | 15 deg Screw Shank Coil Nails | .099 | 2-1/2" | 9000 |
| 02-BOB200V-LI | 9910000027 | 15 deg Screw Shank Coil Nails | .099 | 2" | 9000 |
| 02-DL238C5-LI | 9910000076 | 31-34 deg paper tape | .113 | 2-3/8" | 5000 |
| 02-DL325C-LI | 9910000028 | 31-34 deg paper tape | .120 | 3-1/4" | 3000 |



Ball pein hammer with hickory handle

Rugged and resistant hickory handle. Metal wedges to maintain head on handle. Shape of the handle allows for a better grip.

| # Manufacturer | # Ficodis |
|----------------|------------|
| CR4005 | 9900000121 |



Ball pein hammer with fiberglass handle

Rugged and resistant fiberglass handle. Metal wedges to maintain head on handle. Shape of the handle allows for a better grip.

| # Manufacturer | # Ficodis | Length | Head weight |
|----------------|------------|-----------|-------------|
| CR4024 | 9900004801 | 13-1/2" | 24 oz |
| CR4032 | 9900004802 | 13-25/32" | 32 oz |



Sledge hammer with fiberglass handle

PVC handles. High fiberglass content. Polymer sheath prevents splintering. Forged steel heads. Use down to -25°C.

| # Manufacturer | # Ficodis | Length | Head weight |
|----------------|------------|--------|-------------|
| 740532 | 000024171 | 16" | 4 lb |
| 740533 | 0000162725 | 30" | 6 lb |
| 740534 | 0000114657 | 30" | 8 lb |
| 740535 | 0000162726 | 36" | 10 lb |
| 740536 | 0000162727 | 36" | 12 lb |



10pc screwdriver set

Ergonomic & robust. Multifunction perforated handle. Chrome vanadium steel blade. Strong grip. 25% more torque transfer.

| # Manufacturer | # Ficodis |
|----------------|------------|
| CR2800 | 9900004828 |



Heavy-duty bottle jack

Can be used in vertical and horizontal positions (valve side down). Factory pre-tested to 150% of rated capacity. Heat treated pistons for maximum strength. Heavy-duty steel saddle for secure lifts. Centered pumps and rams for balance and easy positioning. Convenient carrying handle on 12 - 50 ton models.



| # Manufacturer | # Ficodis | Tons |
|----------------|------------|------|
| 030102 | 0000033834 | 2 |
| 030103 | 0000105816 | 4 |
| 030104 | 0000105964 | 6 |
| 030106 | 0000033835 | 12 |
| 030110 | 0000096529 | 20 |
| 030112 | 0000105967 | 30 |

POLYURETHANE FOAM

LIONPROFOAM

LPF0001

DOORS & WINDOWS



Gun version



Doors



Windows



Application

LPF0004

ALL SEASONS



Gun version



All seasons



Multi-usage




Application



Ficodis group brand | ficodis.com

CUTTING TOOLS

- DISCS AND PADS
- RETAINER NUTS
- MAGNETIC DRILLS
- ANNULAR CUTTERS
- PILOT PINS
- CALIPERS
- SAW BLADES
- DRILLS
- CARBIDE INSERTS
- COUNTERSINKS
- TAPS
- CARBIDE END MILL



NORTON RAZORSTAR™
SAINT-GOBAIN

SHARPER THAN EVER



HIGHER CUT RATE



LONGER LIFE



COOLER CUT



SCAN FOR
MORE INFORMATION



CUTTING TOOLS



Gemini Quick-Change Type II Disc



Versatile aluminum oxide abrasive. Durable Y-weight, 2-ply polyester backing. For weld blending, stock removal, and deburring aluminum, stainless, carbon steels, titanium.

| # Manufacturer | # Ficodis | Diam. | Grain. |
|----------------|------------|-------|--------|
| 69957399638 | 0000162684 | 2" | 36 |
| 69957399639 | 0000162685 | 2" | 40 |
| 69957399640 | 0000162686 | 2" | 50 |
| 69957399641 | 0000162687 | 2" | 60 |
| 69957399642 | 0000162688 | 2" | 80 |
| 69957399644 | 0000162689 | 2" | 120 |
| 69957399646 | 0000162690 | 2" | 180 |
| 69957399647 | 0000162691 | 2" | 240 |
| 69957399648 | 0000162692 | 2" | 320 |



RazorStar Fiber Disc F990S



Technically shaped ceramic grain technology. Unique, razor-sharp grain. Grit 36. 25 per box.

| # Manufacturer | # Ficodis | Diam. | RPM Max. |
|----------------|------------|---------------|----------|
| 66254427990 | 0000162693 | 4-1/2" x 7/8" | 11 000 |
| 66254427991 | 0000162694 | 5" x 7/8" | 10 000 |
| 66254438198 | 0000162695 | 6" x 7/8" | 8 600 |
| 66254427992 | 0000162696 | 7" x 7/8" | 8 600 |



Retainer nut for back-up pads



Designed for medium to heavy grinding applications. Split aluminum hub design draws cool air behind the disc. Curved ribs on the rubber face keep heat away from the disc and holder.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 63642543463 | 0000162703 |



RazorStar Quick-Change Disc



RazorStar cloth with new ceramic grain technology. Designed for medium- to high-pressure metal removal in the most demanding grinding applications. Grit 36. 25 per box.

Quick-change system: TR Type 3

| # Manufacturer | # Ficodis | Diam. | RPM Max. |
|----------------|------------|-------|----------|
| 66254427834 | 0000162697 | 2" | 30 000 |

Quick-change system: TR Type 2

| # Manufacturer | # Ficodis | Diam. | RPM Max. |
|----------------|------------|-------|----------|
| 66254427835 | 0000162698 | 2" | 10 000 |



Fiber Disc Backup Pad



Air-cooled, vacuum-free medium-density support pad for fiber and nonwoven discs.

| # Manufacturer | # Ficodis | Diam. | RPM Max. |
|----------------|------------|------------------|----------|
| 63642502122 | 0000162699 | 4-1/2" x 5/8-11" | 11 000 |
| 63642543421 | 0000162700 | 5" x 5/8-11" | 10 000 |
| 66261160043 | 0000162701 | 6" x 5/8-11" | 30 000 |
| 63642543422 | 0000162702 | 7" x 5/8-11" | 8 600 |



Portable magnetic Drill



Light, compact, powerful and versatile. Large 1-1/2" x 2" capacity. Hidden motor cord. Ergonomic housing. 450 RPM

| # Manufacturer | # Ficodis |
|----------------|------------|
| HMD904 | 0000109252 |



Magnetic drill set



Diam: 1 5/8". 13 amp motor. gearbox - 2 speeds. 475 to 730 RPM.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 4272-21 | 0000095534 |



ICECUT MINI™ magnetic drill press



Lightweight unit. Permanent electromagnet for safety and functionality. Low profile and compact body allow for making holes in extremely tight spaces. Walter's Dynamax speed control ensures RPM speeds remain constant. 250-500 No Load RPM.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 39D050 | 0000115609 |

CUTTING TOOLS



High-speed steel annular cutter

High-speed steel alloy. Type of points: centering bit.
Diam: 3/4"x1-3/16"

| # Manufacturer | # Ficodis | Diam. |
|----------------|------------|---------|
| 100HSS03264W | 0000162673 | 1/2" |
| 100HSS03664W | 0000162674 | 9/16" |
| 100HSS04064W | 0000162675 | 5/8" |
| 100HSS04464W | 0000162676 | 11/16" |
| 100HSS04864W | 0000162677 | 3/4" |
| 100HSS05264W | 0000162678 | 13/16" |
| 100HSS05664W | 0000162679 | 7/8" |
| 100HSS06064W | 0000162680 | 15/16" |
| 100HSS06464W | 0000162681 | 1" |
| 100HSS06864W | 0000162682 | 1-1/16" |
| 100HSS08064W | 0000162683 | 1-1/4" |

Karnasch




Pilot Pin

6.34x77mm pilot pin for annular cutters

| # Manufacturer | # Ficodis | Diam. |
|----------------|------------|-------|
| 20.1261 | 0000025135 | 3" |
| 20.1271 | 0000025136 | 4" |

Karnasch



Starrett

Intenss Pro saw blade™

This bandsaw blade is made of bimetal with a special finish.

| # Manufacturer | # Ficodis | Dimensions | TPI |
|-----------------|------------|------------------------|---------|
| 99102-05-04-1/2 | 0000162712 | 5'4-1/2 x 1/2" x .025" | 6-10/P |
| 99165-05-04-1/2 | 0000162713 | 5'4-1/2 x 1/2" x .025" | 8-12/P |
| 99186-05-04-1/2 | 0000162714 | 5'4-1/2 x 1/2" x .025" | 10-14/P |

TENNAX™-PRO BI-METAL BAND SAW BLADES

Starrett

NEW !



FEATURES

- New tooth geometry for cutting pipes and structural profiles
- M42 High Speed Edge
- Exclusive tooth setting process

BENEFITS

- High level of productivity in extreme cutting processes used for pipes, profiles, and structural materials
- Increased resistance to wear and tooth breakage
- Low noise, low vibration and improved cutting performance
- Increased resistance to wear and tooth breakage

APPLICATIONS

- Pipes, tubes, and structurals
- Small solids
- Bundles
- For all machines: manual, hydraulic, gravity fed, etc.

BAND SAW BLADES

| Width x Thickness in | mm | Pitch/Rake | Material No. |
|-------------------------|-----------|--------------|--------------|
| 3/4 x .035 | 19 x 0.90 | 4-6/TX-P-H | 99567 |
| | | 5-8/TX-P-H | 99568 |
| | | 6-10/TX-P-H | 99569 |
| | | 8-12/TX-P-H | 99570 |
| | | 10-14/TX-P-H | 99571 |
| 1 x .035 | 27 x 0.90 | 3-4/TX-P-H | 99572 |
| | | 4-6/TX-P-H | 99573 |
| | | 5-8/TX-P-H | 99574 |
| | | 6-10/TX-P-H | 99575 |
| | | 8-12/TX-P-H | 99576 |
| 1-1/4 x .042 | 34 x 1.10 | 10-14/TX-P-H | 99577 |
| | | 2-3/TX-P-H | 99578 |
| | | 3-4/TX-P-H | 99579 |
| | | 4-6/TX-P-H | 99580 |
| | | 5-8/TX-P-H | 99581 |
| 1-1/2 x .050 | 41 x 1.30 | 6-10/TX-P-H | 99582 |
| | | 2-3/TX-P-H | 99583 |
| | | 3-4/TX-P-H | 99584 |
| | | 4-6/TX-P-H | 99585 |
| | | 5-8/TX-P-H | 99586 |
| 2 x .063 | 54 x 1.60 | 2-3/TX-P-H | 99587 |
| | | 3-4/TX-P-H | 99588 |
| | | 4-6/TX-P-H | 99589 |
| 2-5/8 x .063 | 67 x 1.60 | 2-3/TX-P-H | 99590 |
| | | 3-4/TX-P-H | 99591 |

TX - TENNAX-PRO tooth profile | P - Positive rake | H - Heavy set



CUTTING TOOLS



29pc HSS Borado drill set

Mechanical length: 1/16 to 1/2" to 64th.
Material: HSS - High-speed steel. Black and gold finish. Point: 135°. Shank type: 3-flat.

Made in United States

| # Manufacturer | # Ficodis |
|----------------|------------|
| CD29P | 9900004845 |



26pc drill set

Material: HSS. Titanium nitride (TiN) coating. Finish: bright. Point: 118°. Size: letter A to Z.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 5967714 | 0000019517 |



60pc drill set

Material: HSS. Titanium nitride (TiN) coating. drill set #1-60
Finish: Bright.
Point: 118°.

| # Manufacturer | # Ficodis |
|----------------|------------|
| 5967709 | 0000019516 |



Rotating negative inserts

Can be used up to 0.508" deep. Has T9325 black coating. 10 inserts per box.
Apply: Roughing - stainless steel.



| # Manufacturer | # Ficodis | Use |
|--------------------|------------|-----------------------------------|
| CNMG 432-NM T 7325 | 0000120742 | Roughing - stainless steel |
| CNMG 432-FM T 7325 | 0000120743 | General purpose - stainless steel |
| CNMG 432-NM T 9325 | 0000120744 | Roughing - steel |
| CNMG 432-FM T 9325 | 0000120745 | General purpose - steel |



Mitutoyo Canada | Precision is our Profession
@MitutoyoCanada

Follow Us on Social Media!



Mitutoyo Canada products and services give you the advantage.

The Mitutoyo Advantage include:

- Consistently high-quality products, software, and accessories
- Industry-leading Service & Support
- Decreased wait time with the Expedited Services and the Calibrated Tools program using our in-house Repair & Calibration Departments
- Easy access to our Contract Inspection and Programming Services

Visit our website mitutoyo.ca or email us at info@mitutoyo.ca for more details.





Coordinate Measuring Machines

Vision Measuring Systems

Form Measurement

Optical Measuring





Sensor Systems

Test Equipment

Digital Scale and DRO Systems


Small Tool Instruments and Data Management



Whatever your challenges are, Mitutoyo Canada supports you from start to finish.

Mitutoyo is not only a manufacturer of top-quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed by comprehensive services that ensure your staff can make the very best use of the investment.


Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even take your critical measurement challenges in-house on a sub-contract basis.

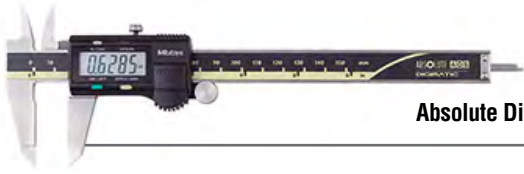

Absolute Digimatic caliper

Mitutoyo

| # Manufacturer | # Ficodis | Range | Resolution |
|----------------|------------|-----------------|-----------------|
| 500-196-30 | 0000027442 | 0 - 6" / 150 mm | .0005" / 0.01mm |
| 500-197-30 | 0000027443 | 0 - 8" / 200 mm | .0005" / 0.01mm |

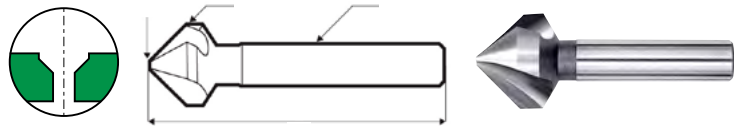


82° Countersink 3 flutes

Larger flutes to facilitate chip evacuation.
Spoon cutter.
Material: HSS-E Cobalt.
Series: M08 - metrics / imperial.

| # Manufacturer | # Ficodis | Diam. d Metric | Diam. d Imperial | d1 maxi | D h9 | L +/- 1 |
|----------------|------------|-------------------|---------------------|------------|---------|------------|
| 77200620 | 9900004474 | 9,52 | (3/8) | 2,50 | 6,35 | 50 |
| 77200630 | 9900004473 | 12,70 | (1/2) | 2,90 | 6,35 | 50 |
| 77200640 | 9900004472 | 15,87 | (5/8) | 3,20 | 9,52 | 60 |
| 77200650 | 9900004471 | 19,05 | (3/4) | 3,50 | 9,52 | 60 |
| 77200660 | 9900004470 | 25,40 | (1) | 3,80 | 9,52 | 70 |

CROMSON

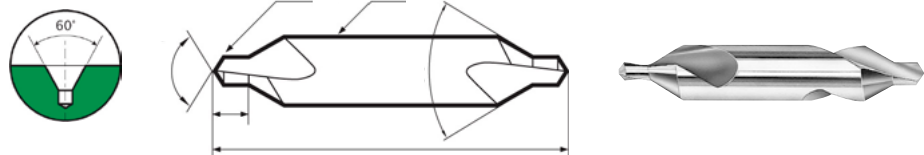

60° Center drill (double)

Material: hardness 63 HRC for machining steels up to 800 N/mm², copper, brass, bronze, aluminum up to 6% Si.
M01 series - metric / imperial.

| # Manufacturer | # Ficodis | ASA | D x d h7 k12 | L +/-1 | l mini - maxi |
|----------------|------------|-----|-------------------------------|-----------|------------------|
| 77100104 | 9900004381 | 1 | 3,17 x 1,19 (1/8 x ,3/64) | 31 | 1,4 - 1,7 |
| 77100106 | 9900004382 | 2 | 4,76 x 1,98 (3/16 x 5/64) | 47 | 2,4 - 2,7 |
| 77100108 | 9900004383 | 3 | 6,35 x 2,77 (1/4 x 7/64) | 50 | 3,3 - 3,9 |
| 77100110 | 9900004384 | 4 | 7,93 x 3,17 (5/16 x 1/8) | 54 | 3,8 - 4,4 |
| 77100112 | 9900004385 | 5 | 11,11 x 4,76 (7/16 x 3/13) | 63 | 5,9 - 6,5 |

CROMSON




CUTTING TOOLS




90° Countersink

Material: HSS-E Cobalt / Carbide. Series: M08 - metrics / imperial.



| # Manufacturer | # Ficodis | Diam. d Metric | d1 maxi | D h9 | L +/- 1 |
|----------------|------------|-------------------|------------|---------|------------|
| 77200310 | 9900004437 | 10,40 | | 6,00 | 50 |
| 77200330 | 9900004441 | 16,50 | 3,20 | 8,00 | 56 |
| 77200340 | 9900004443 | 20,50 | 3,50 | 10,00 | 63 |



Step drill for sheet metal and thin material

Hardness 63 HRC for machining steels up to 800 N/mm², copper, brass, bronze, aluminum up to 6% Si.
 Straight flutes for easy penetration and 3 flats for more rigid clamping.
 M02 series - metric.
 Diam: 38. l: 100". l1: 4. d:10.
 Opening capacity: 6,9,13,16,19,21,23,26,29,32,35,38



| # Manufacturer | # Ficodis | Diam. | L | l1 | d |
|----------------|------------|-------|-----|----|----|
| 77100430 | 9900004414 | 38 | 100 | 4 | 10 |

HSSE spiral point taps - CRPS

General application: hardened tool steel.
 Hole type: through hole.
 Surface treatment: steam.
 Materials to be machined: 4140, 4340, H13

Other: D2, P20.
 Hardness limit: up to 35 HRC.
 Standard tap length.



| # Manufacturer | # Ficodis | Cromson Description | Diam. Thread | Nb Thread | Nb Flutes | Thread Limit | OAL | Tap length |
|----------------|------------|---------------------|-----------------|-----------|-----------|--------------|---------|------------|
| 76001055 | 9900003935 | CRPS - 1/4-20 - SP | 1/4 | 20 | 3 | H3 | 2.1/2 | 0,630 |
| 76001065 | 9900003937 | CRPS - 5/16-18 - SP | 5/16 | 18 | 3 | H3 | 2.23/32 | 0,748 |
| 76001075 | 9900003939 | CRPS - 3/8-16 - SP | 3/8 | 16 | 3 | H3 | 2.15/16 | 0,748 |
| 76001090 | 9900003942 | CRPS - 1/2-13 - SP | 1/2 | 13 | 3 | H3 | 3 3/8 | 0,945 |
| 76001100 | 9900003944 | CRPS - 5/8-11 - SP | 5/8 | 11 | 3 | H3 | 3.13/16 | 1,102 |
| 76001110 | 9900003946 | CRPS - 3/4-10 - SP | 3/4 | 10 | 3 | H3 | 4.1/4 | 1,220 |

HSSE spiral flute taps - CRM

General application: Stainless steel
 Hole type: Blind hole
 Surface treatment: steam
 Materials to be machined: 304, 316, 316L

Other: 17-4, 15-5, A286
 Hardness limit: Up to 35HRC
 Standard tap length.



| # Manufacturer | # Ficodis | Cromson Description | Diam. Thread | Nb Thread | Nb Flutes | Thread Limit | OAL | Tap length |
|----------------|------------|---------------------|-----------------|-----------|-----------|--------------|---------|------------|
| 76003235 | 9900004135 | CRM - 1/4-20 - SF | 1/4 | 20 | 3 | H3 | 2.1/2 | 0,500 |
| 76003245 | 9900004137 | CRM - 5/16-18 - SF | 5/16 | 18 | 3 | H3 | 2.23/32 | 0,556 |
| 76003255 | 9900004139 | CRM - 3/8-16 - SF | 3/8 | 16 | 3 | H3 | 2.15/16 | 0,625 |
| 76003275 | 9900004143 | CRM - 1/2-13 - SF | 1/2 | 13 | 3 | H3 | 3.3/8 | 0,769 |
| 76003290 | 9900004146 | CRM - 5/8-11 - SF | 5/8 | 11 | 4 | H3 | 3.13/16 | 0,909 |
| 76003300 | 9900004148 | CRM - 3/4-10 - SF | 3/4 | 10 | 4 | H3 | 4.1/4 | 1,000 |

CUTTING TOOLS



Carbide end mill - square or radius 4 flutes



Diameter range: 0.125-1.000 in.
Shank tolerance: h6.
Diameter tolerance: (+0.00-0.002 in.) +0.00-0.05 mm.
Coating: TiAlN (PVD).

Helix: standard, 38° angle.
Cutting center.
Variable pitch.



| # | Manufacturer | # Ficodis | Cromson Description | Diam. | Length of cut | Overall length | Chamfer / radius |
|----------|--------------|------------|-----------------------------|-------|---------------|----------------|------------------|
| 72000250 | | 9900000246 | CREM-ST-4SC-0125- SQ Cr55 | 1/8 | 1/4 | 1.1/2 | --- |
| 72000255 | | 9900000247 | CREM-ST-4SC-0125-R010- Cr55 | 1/8 | 1/4 | 1.1/2 | .010 |
| 72000260 | | 9900000248 | CREM-ST-4SC-0125-R015- Cr55 | 1/8 | 1/4 | 1.1/2 | .015 |
| 72000265 | | 9900000249 | CREM-ST-4RC-0125- SQ Cr55 | 1/8 | 1/2 | 2 | --- |
| 72000270 | | 9900000250 | CREM-ST-4RC-0125-R010- Cr55 | 1/8 | 1/2 | 2 | .010 |
| 72000275 | | 9900000251 | CREM-ST-4SC-0187- SQ Cr55 | 3/16 | 5/16 | 1.1/2 | --- |
| 72000280 | | 9900000252 | CREM-ST-4SC-0187-R015- Cr55 | 3/16 | 5/16 | 1.1/2 | .015 |
| 72000285 | | 9900000253 | CREM-ST-4RC-0187- SQ Cr55 | 3/16 | 5/8 | 2 | --- |
| 72000290 | | 9900000254 | CREM-ST-4RC-0187-R015- Cr55 | 3/16 | 5/8 | 2 | .015 |
| 72000295 | | 9900000255 | CREM-ST-4EC-0187- SQ Cr55 | 3/16 | 7/8 | 2.1/2 | --- |
| 72000300 | | 9900000256 | CREM-ST-4SC-0250- SQ Cr55 | 1/4 | 3/8 | 2 | --- |
| 72000305 | | 9900000257 | CREM-ST-4SC-0250-R015- Cr55 | 1/4 | 3/8 | 2 | .015 |
| 72000310 | | 9900000258 | CREM-ST-4SC-0250-R030- Cr55 | 1/4 | 3/8 | 2 | .030 |
| 72000315 | | 9900000259 | CREM-ST-4RC-0250- SQ Cr55 | 1/4 | 3/4 | 2.1/2 | --- |
| 72000320 | | 9900000260 | CREM-ST-4RC-0250-R020- Cr55 | 1/4 | 3/4 | 2.1/2 | .020 |
| 72000325 | | 9900000261 | CREM-ST-4RC-0250-R030- Cr55 | 1/4 | 3/4 | 2.1/2 | .030 |
| 72000330 | | 9900000262 | CREM-ST-4RC-0250-R060- Cr55 | 1/4 | 3/4 | 2.1/2 | .060 |
| 72000335 | | 9900000263 | CREM-ST-4LC-0250- SQ Cr55 | 1/4 | 1.1/4 | 3 | --- |
| 72000340 | | 9900000264 | CREM-ST-4LC-0250-R020- Cr55 | 1/4 | 1.1/4 | 3 | .020 |
| 72000345 | | 9900000265 | CREM-ST-4SC-312- SQ Cr55 | 5/16 | 1/2 | 2 | --- |
| 72000350 | | 9900000266 | CREM-ST-4SC-0312-R020- Cr55 | 5/16 | 1/2 | 2 | .020 |
| 72000355 | | 9900000267 | CREM-ST-4RC-0312- SQ Cr55 | 5/16 | 13/16 | 2.1/2 | --- |
| 72000360 | | 9900000268 | CREM-ST-4RC-0312-R020- Cr55 | 5/16 | 13/16 | 2.1/2 | .020 |
| 72000365 | | 9900000269 | CREM-ST-4SC-0375- SQ Cr55 | 3/8 | 1/2 | 2 | --- |
| 72000370 | | 9900000270 | CREM-ST-4SC-0375-R020- Cr55 | 3/8 | 1/2 | 2 | .020 |
| 72000375 | | 9900000271 | CREM-ST-4SC-0375-R030- Cr55 | 3/8 | 1/2 | 2 | .030 |
| 72000380 | | 9900000272 | CREM-ST-4RC-0375- SQ Cr55 | 3/8 | 7/8 | 2.1/2 | --- |
| 72000385 | | 9900000273 | CREM-ST-4RC-0375-R020- Cr55 | 3/8 | 7/8 | 2.1/2 | .020 |
| 72000390 | | 9900000274 | CREM-ST-4RC-0375-R030- Cr55 | 3/8 | 7/8 | 2.1/2 | .030 |
| 72000395 | | 9900000275 | CREM-ST-4RC-0375-R060- Cr55 | 3/8 | 7/8 | 2.1/2 | .060 |
| 72000400 | | 9900000276 | CREM-ST-4RC-0375-R120- Cr55 | 3/8 | 7/8 | 2.1/2 | .120 |
| 72000405 | | 9900000277 | CREM-ST-4EC-0375- SQ Cr55 | 3/8 | 1.1/8 | 3 | --- |
| 72000410 | | 9900000278 | CREM-ST-4EC-0375-R020- Cr55 | 3/8 | 1.1/8 | 3 | .020 |
| 72000415 | | 9900000279 | CREM-ST-4LC-0375- SQ Cr55 | 3/8 | 1.1/2 | 3.1/2 | --- |
| 72000420 | | 9900000280 | CREM-ST-4LC-0375-R030- Cr55 | 3/8 | 1.1/2 | 3.1/2 | .030 |
| 72000425 | | 9900000281 | CREM-ST-4RC-0437- SQ Cr55 | 7/16 | 1 | 2.3/4 | --- |
| 72000430 | | 9900000282 | CREM-ST-4SC-0500- SQ Cr55 | 1/2 | 5/8 | 2.1/2 | --- |
| 72000435 | | 9900000283 | CREM-ST-4SC-0500-R020- Cr55 | 1/2 | 5/8 | 2.1/2 | .020 |
| 72000440 | | 9900000284 | CREM-ST-4SC-0500-R030- Cr55 | 1/2 | 5/8 | 2.1/2 | .030 |
| 72000445 | | 9900000285 | CREM-ST-4RC-0500- SQ Cr55 | 1/2 | 1 | 3 | --- |
| 72000450 | | 9900000286 | CREM-ST-4RC-0500-R030- Cr55 | 1/2 | 1 | 3 | .030 |
| 72000455 | | 9900000287 | CREM-ST-4RC-0500-R060- Cr55 | 1/2 | 1 | 3 | .060 |
| 72000460 | | 9900000288 | CREM-ST-4EC-0500- SQ Cr55 | 1/2 | 1.1/4 | 3 | --- |
| 72000465 | | 9900000289 | CREM-ST-4EC-0500-R020- Cr55 | 1/2 | 1.1/4 | 3 | .020 |
| 72000470 | | 9900000290 | CREM-ST-4EC-0500-R030- Cr55 | 1/2 | 1.1/4 | 3 | .030 |
| 72000475 | | 9900000291 | CREM-ST-4EC-0500-R060- Cr55 | 1/2 | 1.1/4 | 3 | .060 |
| 72000480 | | 9900000292 | CREM-ST-4EC-0500-R090- Cr55 | 1/2 | 1.1/4 | 3 | .090 |
| 72000485 | | 9900000293 | CREM-ST-4EC-0500-R120- Cr55 | 1/2 | 1.1/4 | 3 | .120 |




CUTTING TOOLS

| | | | | | | |
|----------|------------|-----------------------------|------|-------|-------|------|
| 72000490 | 9900000294 | CREM-ST-4MC-0500- SQ Cr55 | 1/2 | 1.5/8 | 3.1/2 | --- |
| 72000495 | 9900000295 | CREM-ST-4LC-0500- SQ Cr55 | 1/2 | 2 | 4 | --- |
| 72000500 | 9900000296 | CREM-ST-4LC-0500-R030- Cr55 | 1/2 | 2 | 4 | .030 |
| 72000505 | 9900000297 | CREM-ST-4RC-0562- SQ Cr55 | 9/16 | 1.1/4 | 3.1/2 | --- |
| 72000510 | 9900000298 | CREM-ST-4RC-0625- SQ Cr55 | 5/8 | 1.1/4 | 3.1/2 | --- |
| 72000515 | 9900000299 | CREM-ST-4RC-0625-R030- Cr55 | 5/8 | 1.1/4 | 3.1/2 | .030 |
| 72000520 | 9900000300 | CREM-ST-4RC-0625-R060- Cr55 | 5/8 | 1.1/4 | 3.1/2 | .060 |
| 72000525 | 9900000301 | CREM-ST-4EC-0625- SQ Cr55 | 5/8 | 1.5/8 | 3.1/2 | --- |
| 72000530 | 9900000302 | CREM-ST-4EC-0625-R030- Cr55 | 5/8 | 1.5/8 | 3.1/2 | .030 |
| 72000535 | 9900000303 | CREM-ST-4SC-0750- SQ Cr55 | 3/4 | 7/8 | 3 | --- |
| 72000540 | 9900000304 | CREM-ST-4SC-0750-R030- Cr55 | 3/4 | 7/8 | 3 | .030 |
| 72000545 | 9900000305 | CREM-ST-4SC-0750-R060- Cr55 | 3/4 | 7/8 | 3 | .060 |
| 72000550 | 9900000306 | CREM-ST-4RC-0750- SQ Cr55 | 3/4 | 1.1/2 | 4 | --- |
| 72000555 | 9900000307 | CREM-ST-4RC-0750-R030- Cr55 | 3/4 | 1.1/2 | 4 | .030 |
| 72000560 | 9900000308 | CREM-ST-4RC-0750-R060- Cr55 | 3/4 | 1.1/2 | 4 | .060 |
| 72000565 | 9900000309 | CREM-ST-4RC-0750-R090- Cr55 | 3/4 | 1.1/2 | 4 | .090 |
| 72000570 | 9900000310 | CREM-ST-4RC-0750-R120- Cr55 | 3/4 | 1.1/2 | 4 | .120 |
| 72000575 | 9900000311 | CREM-ST-4EC-0750- SQ Cr55 | 3/4 | 1.3/4 | 4 | --- |
| 72000580 | 9900000312 | CREM-ST-4EC-0750-R030- Cr55 | 3/4 | 1.3/4 | 4 | .030 |
| 72000585 | 9900000313 | CREM-ST-4EC-0750-R060- Cr55 | 3/4 | 1.3/4 | 4 | .060 |
| 72000590 | 9900000314 | CREM-ST-4EC-0750-R120- Cr55 | 3/4 | 1.3/4 | 4 | .120 |
| 72000595 | 9900000315 | CREM-ST-4MC-0750- SQ Cr55 | 3/4 | 2.3/8 | 5 | --- |
| 72000600 | 9900000316 | CREM-ST-4RC-1000- SQ Cr55 | 1 | 1.1/2 | 4 | --- |
| 72000605 | 9900000317 | CREM-ST-4RC-1000-R030- Cr55 | 1 | 1.1/2 | 4 | .030 |
| 72000610 | 9900000318 | CREM-ST-4RC-1000-R060- Cr55 | 1 | 1.1/2 | 4 | .060 |
| 72000615 | 9900000319 | CREM-ST-4RC-1000-R120- Cr55 | 1 | 1.1/2 | 4 | .120 |
| 72000620 | 9900000320 | CREM-ST-4RW-0500- SQ Cr55 | 1/2 | 1 | 3 | --- |
| 72000625 | 9900000321 | CREM-ST-4RW-0500-R015- Cr55 | 1/2 | 1 | 3 | .015 |
| 72000630 | 9900000322 | CREM-ST-4RW-0500-R030- Cr55 | 1/2 | 1 | 3 | .030 |
| 72000635 | 9900000323 | CREM-ST-4RW-0500-R060- Cr55 | 1/2 | 1 | 3 | .060 |
| 72000640 | 9900000324 | CREM-ST-4EW-0500- SQ Cr55 | 1/2 | 1.1/4 | 3 | --- |
| 72000645 | 9900000325 | CREM-ST-4EW-0500-R030- Cr55 | 1/2 | 1.1/4 | 3 | .030 |
| 72000650 | 9900000326 | CREM-ST-4EW-0500-R060- Cr55 | 1/2 | 1.1/4 | 3 | .060 |
| 72000655 | 9900000327 | CREM-ST-4MW-0500- SQ Cr55 | 1/2 | 1.5/8 | 3.1/2 | --- |
| 72000660 | 9900000328 | CREM-ST-4RW-0562- SQ Cr55 | 9/16 | 1.1/4 | 3.1/2 | --- |
| 72000665 | 9900000329 | CREM-ST-4RW-0625- SQ Cr55 | 5/8 | 1.1/4 | 3.1/2 | --- |
| 72000670 | 9900000330 | CREM-ST-4RW-0625-R030- Cr55 | 5/8 | 1.1/4 | 3.1/2 | .030 |
| 72000675 | 9900000331 | CREM-ST-4RW-0625-R060- Cr55 | 5/8 | 1.1/4 | 3.1/2 | .060 |
| 72000680 | 9900000332 | CREM-ST-4EW-0625- SQ Cr55 | 5/8 | 1.5/8 | 3.1/2 | --- |
| 72000685 | 9900000333 | CREM-ST-4EW-0625-R030- Cr55 | 5/8 | 1.5/8 | 3.1/2 | .030 |
| 72000690 | 9900000334 | CREM-ST-4SW-0750- SQ Cr55 | 3/4 | 7/8 | 3 | --- |
| 72000695 | 9900000335 | CREM-ST-4SW-0750-R030- Cr55 | 3/4 | 7/8 | 3 | .030 |
| 72000700 | 9900000336 | CREM-ST-4SW-0750-R060- Cr55 | 3/4 | 7/8 | 3 | .060 |
| 72000705 | 9900000337 | CREM-ST-4RW-0750- SQ Cr55 | 3/4 | 1.1/2 | 4 | --- |
| 72000710 | 9900000338 | CREM-ST-4RW-0750-R030- Cr55 | 3/4 | 1.1/2 | 4 | .030 |
| 72000715 | 9900000339 | CREM-ST-4RW-0750-R060- Cr55 | 3/4 | 1.1/2 | 4 | .060 |
| 72000720 | 9900000340 | CREM-ST-4RW-0750-R090- Cr55 | 3/4 | 1.1/2 | 4 | .090 |
| 72000725 | 9900000341 | CREM-ST-4RW-0750-R120- Cr55 | 3/4 | 1.1/2 | 4 | .120 |
| 72000730 | 9900000342 | CREM-ST-4EW-0750- SQ Cr55 | 3/4 | 1.3/4 | 4 | --- |
| 72000735 | 9900000343 | CREM-ST-4EW-0750-R030- Cr55 | 3/4 | 1.3/4 | 4 | .030 |
| 72000740 | 9900000344 | CREM-ST-4RW-1000- SQ Cr55 | 1 | 1.1/2 | 4 | --- |
| 72000745 | 9900000345 | CREM-ST-4RW-1000-R030- Cr55 | 1 | 1.1/2 | 4 | .030 |
| 72000750 | 9900000346 | CREM-ST-4RW-1000-R060- Cr55 | 1 | 1.1/2 | 4 | .060 |
| 72000755 | 9900000347 | CREM-ST-4RW-1000-R120- Cr55 | 1 | 1.1/2 | 4 | .120 |
| 72000760 | 9900000348 | CREM-ST-4MW-1000- SQ Cr55 | 1 | 2 | 5 | --- |
| 72000765 | 9900000349 | CREM-ST-4LW-1000- SQ Cr55 | 1 | 4 | 7 | --- |


POWER

- ROLLER CHAINS
- GEAR BOXES
- BLUE RUBBER CASTER
- GREASES AND LUBRICANTS
- SELF-ALIGNING BEARINGS
- BEARING HEATER
- GREASES AND LUBRICATORS
- VALVES
- BLOWGUNS
- HOSE REELS
- COUPLERS
- TORQUE WRENCHES
- HYDRAULIC PUMPS
- HYDRAULIC CYLINDERS
- SPEED AND FREQUENCY INVERTERS
- MOTORS



TAPERED ROLLER BEARINGS


Designed to Bear the Unbearable

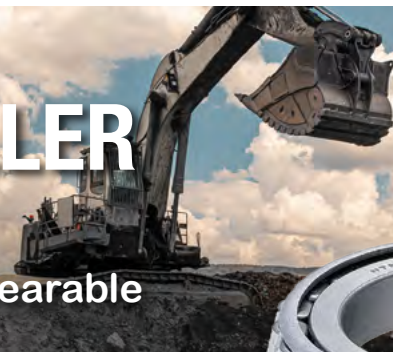

NTN



THE NTN ADVANTAGE



Hardened Case

Pliable Core

Case-Carburized Steel

Premium material with increased surface hardness and pliable core increasing life by 40% while providing superior crack resistance



Superior Quality

Made in USA and Japan featuring crowned rollers, super-finished rollers and raceways



Comprehensive Product Coverage

Available in ISO (metric), Inch, and J-metric series with sizes ranging from 15 mm bore to 2,180 mm O.D.



Trusted for Over a Century

A design leader to the world's largest OEMs and end users, NTN supplies 2/3 of the world's Fortune 500 manufacturers



POWER



Roller chain

Steel : Standard. 10 ft. per box.

| # Manufacturer | # Ficodis | Model | Pas |
|----------------|------------|-----------|------------|
| 35RBCROM | 9900005216 | 35-1 RIV. | 3/8 - ANSI |
| 40RBCROM | 9900005217 | 40-1 RIV. | 1/2 - ANSI |
| 50RBCROM | 9900005218 | 50-1 RIV. | 5/8 - ANSI |
| 60RBCROM | 9900005219 | 60-1 RIV. | 3/4 - ANSI |
| 80RBCROM | 9900005220 | 80-1 RIV | 1 - ANSI |



Roller chains

Steel : Stainless steel.

| # Manufacturer | # Ficodis | Model |
|----------------|------------|-------|
| 35RB | 0000116480 | 35RB |
| 40RB | 0000150448 | 40RB |
| 50RB | 0000119328 | 50RB |
| 60RB | 0000119329 | 60RB |
| 80RB | 0000119332 | 80RB |
| 100RB | 0000116391 | 100RB |



Roller chain



Steel : Stainless steel. 10 ft. per box.

| # Manufacturer | # Ficodis | Model |
|----------------|------------|------------|
| CR35SS | 9900005779 | No.35SS |
| CR41SS | 9900005783 | No.41SS |
| CR40SS | 9900005786 | No.40SS |
| CR50SS | 9900005793 | No.50SS |
| CR60SS | 9900005797 | No.60SS |
| CR80SS | 9900005801 | No.80SS |
| CR100SS | 9900005805 | No.100SS |
| CR2040SS | 9900005808 | No.C2040SS |
| CR2050SS | 9900005811 | No.C2050SS |



Gear box

Ratio 30 .
NEMA.
56C input.

| # Manufacturer | # Ficodis | Modèle |
|----------------|------------|---------|
| CRWND40-30-56C | 9900006764 | Size 40 |
| CRWND50-30-56C | 9900006771 | Size 50 |
| CRWND63-30-56C | 9900006779 | Size 63 |
| CRWND75-30-56C | 9900006786 | Size 75 |



Danfoss' 5600 Series offers a wide array of port configurations and multiple valved and non-valved configurations.

- Self-sealing poppet valve design provides excellent high and low pressure sealing.
- Streamlined valving provides minimum pressure drop.
- High resistance carbon steel with zinc trivalent plating.
- Wide array of customizations offered to suit all applications.
- Highest flow among leading manufacturers

- Applications and markets :
- Hydraulic fluid transfer
 - Agricultural Equipment
 - Construction Equipment
 - Dump, snow plow and maintenance vehicles
 - In-plant manufacturing



Ask your sales representative for a quote for your Danfoss products



Blue rubber caster

Works on all types of surfaces.
 Non-marking. Ball bearing.
 Temperature ranges: -20°c to +70°c.



| # Manufacturer | # Ficodis | Dimension (po) | Charge max (lbs) | Type |
|----------------|------------|----------------|------------------|-------------------|
| CRO10300R | 9900005837 | 3" | 220 | Rigid |
| CRO10400R | 9900005840 | 4" | 286 | Rigid |
| CRO10500R | 9900005843 | 5" | 396 | Rigid |
| CRO10600R | 9900005846 | 6" | 550 | Rigid |
| CRO10300S | 9900005838 | 3" | 220 | Swivel |
| CRO10400S | 9900005841 | 4" | 286 | Swivel |
| CRO10500S | 9900005844 | 5" | 396 | Swivel |
| CRO10600S | 9900005847 | 6" | 550 | Swivel |
| CRO10302S | 9900005839 | 3" | 220 | Swivel with brake |
| CRO10402S | 9900005842 | 4" | 286 | Swivel with brake |
| CRO10502S | 9900005845 | 5" | 396 | Swivel with brake |
| CRO10602S | 9900005848 | 6" | 550 | Swivel with brake |



Leader in motion and control technologies.



Ask your sales representative for a quote on your Paker products





POWER



Lubricant - Multi-purpose release agent TOP TEN

650ml cartridge. Rapidly penetrates even the smallest metal pores. Water-repellent effect. Protects against oxidation and repels moisture from electrical and electronic circuits. Removes traces of grease.



| # Manufacturer | # Ficodis |
|----------------|------------|
| TOP10A2 | 0000095315 |



Water-resistant EP2 multi-purpose grease MULTI 110

400gr. Cartridge Alternative to lithium soap greases. Good resistance to damp environments. Good extreme-pressure performance. Temperature range: -30°C to +110°C (+120°C peak). NLGI grades: 2. 315 Kg load.



| # Manufacturer | # Ficodis |
|----------------|------------|
| MULTI110CA | 0000122737 |



Clear lubricant release agent - REMFOR V7+

800ml aerosol. Seizure-removing lubricant with very low surface tension. Rapid release of parts seized by oxidation. Anti-rust, anti-corrosion, very fast acting, prevents thread-hardening. Non-flammable propellant: CO2.



| # Manufacturer | # Ficodis |
|----------------|------------|
| REV7A3 | 0000028187 |



Eco-friendly tapping fluid - LUBA 50/1

250ml bottle. For tapping high-strength, extra-hard, refractory and stainless steels. Chip removal on small diameters, blind holes, metals with low machinability index on automatic or semi-automatic machines. Can be used in confined spaces.



| # Manufacturer | # Ficodis |
|----------------|------------|
| LUBA50/1FL | 0000122792 |



REQUEST YOUR BELTS NOW



**Environmentally friendly tapping fluid
VG CUT 77**

Aerosol 650/400ml.
Non-flammable, V.O.C.-free, ready-to-use aqueous fluid based on vegetable polymers.



| # Manufacturer | # Ficodis |
|----------------|------------|
| VG CUT 77 A2 | 0000028197 |



**High-temperature assembly paste -
GRIPCOTT NF**

Aerosol 650/500ml.
Synergetic blend of micronized metals (Cu, Al, C). Guarantees excellent protection of parts under extreme conditions of temperature and chemical or atmospheric corrosion. Silver color.



| # Manufacturer | # Ficodis |
|----------------|------------|
| GRNFA2 | 0000028175 |



Fast-evaporating multi-purpose workshop degreaser - STARNET +

Aerosol 650/500ml.
Non-greasy cold degreaser with very high solvent power. Guaranteed free of chlorinated solvents, HCFCs and glycol ethers. Dry surface after evaporation in seconds.
Approved for use in incidental contact with food (registered by NSF International, category K1).



| # Manufacturer | # Ficodis |
|----------------|------------|
| STARNET+A2 | 0000028190 |



OPSIAL



- + grip
- risks
- + comfort
- fatigue

**CONFIDENCE
WITHOUT COMPROMISE**



POWER



Ball Bearing Unit

Grey cast housing.
Radial insert ball bearing with socket set screws - Seal with slinger.



| # Manufacturer | # Ficodis | Shaft diam | Height of axis | Width | On-center spacing | Type |
|----------------|------------|------------|----------------|---------|-------------------|--------------|
| UCP204-012D1 | 0000072104 | 3/4" | 1-5/16" | 5" | 3-3/4" | Pillow block |
| UCP205-100D1 | 0000072105 | 1" | 1-7/16" | 5-1/2" | 4-1/8" | Pillow block |
| UCP207-107D1 | 0000072109 | 1-7/16" | 1-7/8" | 6-9/16" | 5" | Pillow block |



Self Aligning Bearing

Grey cast housing.
Radial insert ball bearing with socket set screws - Seal with slinger.



| # Manufacturer | # Ficodis | Shaft diam | Width | On-center spacing | Type |
|----------------|------------|------------|----------|-------------------|------|
| UCFL204-012D1 | 0000120741 | 3/4" | 4-7/16" | 3-35/64" | Oval |
| UCFL205-100D1 | 0000072103 | 1" | 5-1/8" | 3-57/64" | Oval |
| UCFL207-104D1 | 0000106787 | 1-7/16" | 6-11/32" | 5-1/8" | Oval |



Ball Bearing Unit

Grey cast housing.
Radial insert ball bearing with socket set screws - Seal with slinger.



| # Manufacturer | # Ficodis | Shaft diam | Square dimensions | On-center spacing | Type |
|----------------|------------|------------|-------------------|-------------------|---------------|
| UCF205-100D1 | 0000120739 | 1" | 4-7/16" | 2-3/4" | Square flange |
| UCF207-107D1 | 0000120740 | 1-7/16" | 5-1/8" | 3-5/8" | Square flange |



Insert bearing

Self Lube Bearing Insert.
Bore Size : 1".



| # Manufacturer | # Ficodis |
|----------------|------------|
| UC205-100D1 | 0000072100 |



Portable Induction Bearing Heater

The SKF portable induction heater TWIM 15 is designed for applications in maintenance jobs to heat up bearings that are mounted with an interference fit onto a shaft. Heating the bearing causes it to expand, which eliminates the need to use force during installation - Generally, using the TWIM 15 to generate a 90 °C (162 °F) temperature difference between the bearing and shaft is sufficient to enable installation. The unit has a user-friendly LED control panel that requires no special training and is simple to understand.



| # Manufacturer | # Ficodis |
|----------------|------------|
| TWIM 15 | 0000120830 |



Axios wireless sensor

Pack of 5 triaxial wireless vibration and temperature sensors, IP69, 5-year battery life, 5-year software included.

| # Manufacturer | # Ficodis |
|----------------|------------|
| CMWA 6400-5 | 0000162715 |





NLGI 2 - Bearing Grease

Mineral oil based, lithium soap thickened grease
 Operating temperature range : -30 °C to +120 °C -
 NLGI grade : 2.
 Excellent water resistance and rust inhibiting
 properties.
 Excellent oxidation stability.

| # Manufacturer | # Ficodis |
|----------------|------------|
| LGMT2/0.4 | 0000120827 |



Gas driven single point automatic lubricators

The units are supplied ready-to-use straight from the
 box. Tool-free activation and time-setting allow easy
 and accurate adjustment of lubrication flow.
 Flexible dispense rate from 1 to 12 months.
 Stoppable or adjustable if required.
 Transparent lubricant container allows visual
 inspection of dispense rate.
 Compact size, permits installation in restrictive area.

| # Manufacturer | # Ficodis |
|----------------|------------|
| LAGD 125/WA2 | 0000120829 |



High-pressure two-way ball valves

Carbon steel.
 7,250 PSI.
 2-way.



| # Manufacturer | # Ficodis | Model |
|------------------|------------|----------------------|
| BBV-2-N06-8001-M | 0000150435 | 3/8" NPT - 7 250 PSI |
| BBV-2-N08-8001-M | 0000150436 | 1/2" NPT - 7 250 PSI |
| BBV-2-N12-8001-M | 0000150437 | 3/4" NPT - 7 250 PSI |

SKF®

OUR WORLD REVOLVES
 AROUND ROTATION





POWER



TOPRING
Compressed air solutions

Safety Blow Gun With Silent Nozzle

AIRPRO model. Air Consumption at 87 PSI in SCFM: 4.2 SCFM. Thrust Force at 116 PSI: 0.24 lbf. Noise Level at 87 PSI: 67 dB. Maximum Working Pressure: 232 PSI. Connection: 1/4 (F) NPT. Maximum Operating Temperature: 80°C. Blow gun body in Acetal copolymer (POM).

| # Manufacturer | # Ficodis | Dimensions |
|----------------|------------|--------------------------------------|
| 60.389 | 0000037214 | Tube 8 mm x 10 cm |
| 60.385 | 0000037210 | Tube 8 mm x 10 cm with rubber nozzle |

Hose reel TOPREEL HD with THERMOFLEX hose



TOPREEL HD model w/ THERMOFLEX hose
L Hose Reel With 3/8 I.D. 50 ft.
Polymer Hose.
Bend protectors of air outlet of hose included.
Compatible fluids: compressed air only.
2-arm retractable large steel hose reel with open housing. 1/4 (M) NPT hose.
Hose reel inlet: 1/2 (F) NPT. Hose operating pressure: 300 PSI. Oil-resistant hose (RMA-Class B).
Operating temperature : -26 to 65 °C.

TOPRING
Compressed air solutions

| # Manufacturer | # Ficodis |
|----------------|------------|
| 79.514 | 0000037299 |



1/4 Industrial Composite Quick Coupler

TOPQUIK model. Zero pressure disconnection. Nominal airflow at 100 PSIG: 36 SCFM. Maximum inlet pressure: 225 PSI. Operating temperature : -15 to 70 °C. Automatic connection. Resistant to impact and harsh treatment, for exceptional service life. ISO 4414 safety standards.

TOPRING
Compressed air solutions

| # Manufacturer | # Ficodis |
|----------------|------------|
| 20.449 | 0000061988 |

TOPRING

Compressed air solutions

AIRPRO STEEL SWIVEL ADAPTATER

These full flow free angle fittings provide better tool handling and help reduce wrist fatigue.

- Provide 360° circular rotation and up to a 90° angle in any direction
- Prevent kinking of supply line and extend its service life
- Ergonomic design to help prevent carpal tunnel syndrome



➤ Visit TOPRING.com for the full technical specifications (Series 62).

| | Inlet / Outlet | SCFM | PSI |
|--------|---------------------------|------|-----|
| 62.332 | 1/4 (M) NPT x 1/4 (F) NPT | 30 | 145 |
| 62.334 | 3/8 (M) NPT x 3/8 (F) NPT | 68 | |
| 62.336 | 1/2 (M) NPT x 1/2 (F) NPT | 120 | |



Hydraulic Torque Wrench with Pro Series Swivel

Compact, high-strength uni-body construction provides a small operating radius without sacrificing endurance. 35° rotation angle and rapid return stroke for fast operation. 360° click-on reaction arm with a quick release lever provides easier handling, even when wearing gloves.



| # Manufacturer | # Ficodis |
|----------------|------------|
| S1500PX | 0000162719 |



Low Profile Hydraulic Torque Wrench Drive Unit with Pro Series Swivel

Fitted with the TSP swivel X-Edition hexagon hydraulic torque wrenches set a new standard in safety. Superior strength to size ratio provides easy access to difficult to reach applications without sacrificing endurance. 30° rotation angle and rapid return stroke provide fast operation.



| # Manufacturer | # Ficodis |
|----------------|------------|
| W2000PX | 0000162720 |



Cordless Hydraulic Pump,

Cordless. High-performance brushless motor. Compact, lightweight design for access and use in tight workspaces.

| # Manufacturer | # Ficodis |
|----------------|------------|
| SC1201MB | 0000162716 |



General Purpose Hydraulic Cylinder

The RC-TRIO is the new generation of Enerpac's legendary RC-series single-acting hydraulic cylinders. Pre-tensioned spring for rapid piston retraction. Reinforced retaining ring improves durability and resistance to lateral loads. Polyethylene seals.



| # Manufacturer | # Ficodis |
|----------------|------------|
| RC106 | 0000162718 |



Ultra-light, two-speed hydraulic hand pump

Ultra-light, compact design. Rugged, glass-fiber-reinforced nylon reservoir, nylon-coated aluminum body for maximum corrosion resistance.

Two speeds, up to 80% fewer pump strokes than single-speed pumps. Low lever effort, less operator strain.

| # Manufacturer | # Ficodis |
|----------------|------------|
| P392 | 0000162717 |



DISTRIBUTOR AND CERTIFIED SERVICE CENTER

OF ENERPAC PRODUCTS





POWER



KBMD SCR Drive

Variable speed DC motor control. Motor power 0.5HP 0.4KW. Input 9 amp 115VAC, 50/60Hz. Output 6 AMP 0-90VDC. No heat sink.

| # Manufacturer | # Ficodis |
|----------------|------------|
| KBIC-120 | 0000112119 |



KBPC SCR DC DRIVE

DC variable speed drive Input: 115/230V. Output: 90/180V. 0.75 / 1.5 HP industrial quality. DC variable speed drive. 90/180V. 0.75/1.5HP. NEMA 1.

| # Manufacturer | # Ficodis | Color |
|----------------|------------|-------|
| KBMD-240D | 0000052558 | Noir |



KBPC SCR DC DRIVE

DC drives input: 115/230V. Output: 90/180V. 1, 2 HP. NEMA 4x.

| # Manufacturer | # Ficodis | Color |
|----------------|------------|-------|
| KBPC-240D-9338 | 0000052561 | Black |
| KBPC-240D-9342 | 0000112106 | White |



Hybrid frequency inverter

Frequency inverter input: 115/230V. Output: 230V. 1 HP . NEMA 4x.

| # Manufacturer | # Ficodis | Color |
|----------------|------------|-------|
| KBAC-24D-9987 | 0000112274 | Black |
| KBAC-24D-9988 | 0000052554 | White |



YOUR INDUSTRIAL LUBRICATION PRODUCTS



FIND OUR PRODUCT CATALOGS



Assistance / Hands-on support



- ⊗ Automated inventory management
- ⊗ Corporate image management
- ⊗ Equipment rental
- ⊗ Field installations and commissioning
- ⊗ Logistics
- ⊗ Training
- ⊗ Turnkey solutions
- ⊗ Warehousing

Efficiency



- ⊗ 24/7 Emergency repair
- ⊗ Cost saving
- ⊗ Field services
- ⊗ Vending machines

Repair



- ⊗ Bearing repair
- ⊗ Gearbox repair
- ⊗ Hydraulic components repair (motors, pumps and cylinders)
- ⊗ Motor repair & rewin
- ⊗ Pumps repairs, cylinders, geared motors
- ⊗ Repairs and rebuilds
- ⊗ Warranty and certified repair shop
- ⊗ Warranty and certified repair shop for electric and pneumatic tools

Custom design



- ⊗ Automation & control panels
- ⊗ Consulting, design and installation services
- ⊗ Cooling systems
- ⊗ Creation of customized hoses
- ⊗ Design of customized handling systems
- ⊗ Designing and creation of made to measure parts
- ⊗ Filtration units
- ⊗ Hydraulic power units
- ⊗ Hydraulic test stands
- ⊗ Industrial conveyor systems
- ⊗ Lubrication units
- ⊗ Manifold blocks
- ⊗ Manufacturing of special cutting tools
- ⊗ Mechanical drive systems
- ⊗ Pneumatic control panels
- ⊗ Pumping systems
- ⊗ Sealing solutions
- ⊗ Welding center for band saw blades

Production



- ⊗ Asset management
- ⊗ Bump testing
- ⊗ Calibration of torque wrenches
- ⊗ Calibration services for personal gas monitors
- ⊗ Component assembly and testing
- ⊗ Field assessments
- ⊗ Harness checking
- ⊗ Instrumentation
- ⊗ Oil analysis
- ⊗ On site service & maintenance
- ⊗ Preventative maintenance
- ⊗ Qualifying Fit Tests
- ⊗ Reliability services
- ⊗ Sharpening



EXPERTISE - QUALITY - INNOVATION
Your industrial supplies brand

